

Feed-through terminal, Faston Spade connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Width: 6 mm, Colour: Beige

Business data

Article number	<u>1014.2</u>
Article name	FF 2,5 BG
GTIN (EAN)	4044211003203
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	7.2 g
Weight per piece (including packaging)	8.6 g
Unit of weight	G
Customs number	85369010
Country of origin	BG
Product description	Feed-through terminal

Data sheet

1014.2 FF 2,5 BG

Technical data

Dimensions

Length	48 mm
Width	6 mm
Height TS 35/7.5	47 mm
Height TS 32	52 mm

Ratings

Rated voltage	500 V
Rated current FastOn 2.8 / FastOn 6.3	13,5 / 24 A
Rated impulse voltage TS 35 / TS 32	8 / 6 kV
Overvoltage category	III
Contamination degree	3
Maximum power dissipation for nominal condition	0.77 W

Connection data

Connection principle	Spade connection
Connection position	Lateral
Connections	4
Connections FastOn 2.8 / FastOn 6.3	4 / 8
Number of terminals per level	4
Number of levels	1

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

Further technical data

Mounting type	Mounting rail TS 35/7.5 and TS 32
Gauge plug acc. to EN 60 947-1	A4
Number of cross-connection channels	1
End plate required	✓
Number of test pick-off options	1

Data sheet

1014.2 FF 2,5 BG



Technical data

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

1014.2 FF 2,5 BG

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1:2009
--------------------	-------------------

KEMA KEUR approval granted	yes
----------------------------	-----

KEMA rated voltage	500 V
--------------------	-------

KEMA rated current FastOn 2.8 / FastOn 6.3	13,5 / 24 A
--	-------------

KEMA rated impulse voltage TS 35 / TS 32	8 / 6 kV
--	----------

KEMA wire cross-section stranded	2.5 mm ²
----------------------------------	---------------------



Data sheet

1014.2 FF 2,5 BG

Media



EAC

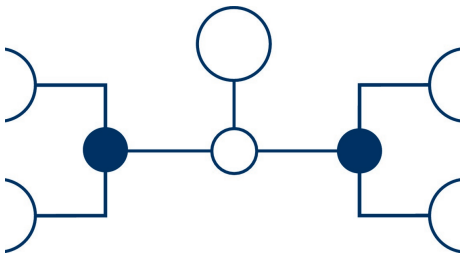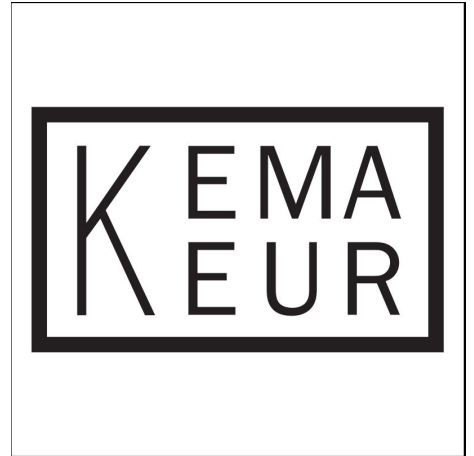

Accessories


End plate



End plate, Width: 1.5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2001.2</u>	AP 2,5-10 BG	4044211047979	50

End stop



End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2828.0</u>	ES 35/K/ST BG	4044211055547	50

Insulating sleeve


Insulating sleeve

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2429.0</u>	IH 6,3	4044211052140	200 ST

Insulating sleeve

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2435.0</u>	IH 2,8	4044211052256	200 ST

Cross-connector



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 17 mm, Rated cross-section: 4 mm², Colour: natural

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2020.0</u>	Q 3	4044211048235	50 ST

Data sheet

1014.2 FF 2,5 BG

Cross-connector



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 10.9 mm, Rated cross-section: 4 mm², Colour: natural

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2019.0</u>	Q 2	4044211048228	50 ST



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 23.1 mm, Rated cross-section: 4 mm², Colour: natural

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2021.0</u>	Q 4	4044211048242	20 ST



Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 59.7 mm, Rated cross-section: 4 mm², Colour: natural

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2022.0</u>	Q 10	4044211048259	10 ST

Partition plate



Partition plate, Width: 1.5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2002.2</u>	TW 2,5-10 BG	4044211048044	50

Insulation plate



Insulation plate, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2003.2</u>	TRS 1 BG	4044211048068	100