



Protective earth terminal, Screw connection, Mounting type: Mounting rail TS 15/5.5, Rated cross-section: 4 mm<sup>2</sup>, Width: 7 mm, Colour: Green-yellow

### Business data

Article number	<u>1064.2</u>
Article name	SL 4/15 GNYE
GTIN (EAN)	4044211012144
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	14 g
Weight per piece (including packaging)	14.5 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Product description	Protective earth terminal
Colour	Green-yellow

### Technical data

#### Dimensions

Length	32 mm
Width	7 mm
Height TS 15/5.5	34 mm

#### Ratings

Rated cross-section	4 mm <sup>2</sup>
Overvoltage category	III
Contamination degree	3

#### Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	4 mm <sup>2</sup>
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	10
Stripping length	9 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

---

### Technical data

---

#### Further technical data

Mounting type	TS 15
Gauge plug acc. to EN 60 947-1	A3
Tightening torque, fastening screw max.	1 Nm
Tightening torque, fastening screw min.	0.5 Nm

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

### Approvals

#### Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

#### cUL Recognized

cUL approval	C22.2 No 158
--------------	--------------

cUL wire cross-section single-core (rigid) AWG, min.	22
------------------------------------------------------	----

cUL wire cross-section single-core (rigid) AWG, max.	10
------------------------------------------------------	----

cUL wire cross-section stranded AWG, min.	22
-------------------------------------------	----

cUL wire cross-section stranded AWG, max.	10
-------------------------------------------	----

cUL torque	7 Nm
------------	------

cUL wire material	Cu
-------------------	----

cUL File Number	E95701
-----------------	--------

cUL Recognized	1
----------------	---

#### KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2:2009
--------------------	-------------------

KEMA KEUR approval granted	yes
----------------------------	-----

KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
---------------------------------------------------	---------------------

KEMA wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
---------------------------------------------------	-------------------

KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
----------------------------------------	---------------------

KEMA wire cross-section stranded, max.	4 mm <sup>2</sup>
----------------------------------------	-------------------

#### UL Recognized

UL approval	UL 1059
-------------	---------

UL wire cross-section single-core (rigid) AWG, min.	22
-----------------------------------------------------	----

UL wire cross-section single-core (rigid) AWG, max.	10
-----------------------------------------------------	----

UL wire cross-section stranded AWG, min.	22
------------------------------------------	----

UL wire cross-section stranded AWG, max.	10
------------------------------------------	----

UL torque	7 Lb In
-----------	---------

UL wire material	Cu
------------------	----


UL factory wiring	1
-------------------	---

UL field wiring	1
-----------------	---


UL File Number	E95701
----------------	--------

UL Recognized	1
---------------	---


### Media

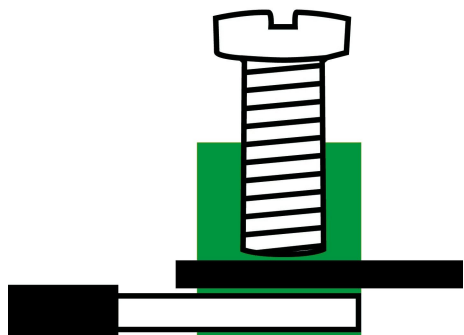

**C** **UL**<sup>®</sup> **US**

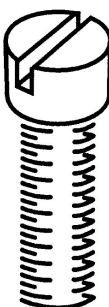**M3** 

**EAC**

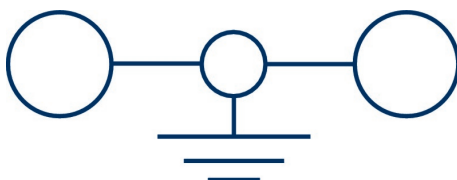


---

### Accessories

---

#### Quick marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4702.7</u>	PMC SB 6/50 WH	4044211089986	500 ST

---

#### Screwdriver

---



Screwdriver with bare blade, Colour: Black-grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1086.0</u>	SDB 0,6x3,5	4044211014797	1 ST

---