



11737.1

STL 960/10/7,62-V-G GN



Male pin block, No. of poles: 10, Width: 74.38 mm, Colour: Green

## Business data

|                                            |                            |
|--------------------------------------------|----------------------------|
| Connector version                          | Attached plug-in connector |
| Packaging unit                             | 50                         |
| Quantity unit                              | PC                         |
| Packaging type                             | Carton                     |
| Type of banding                            | Without                    |
| Weight per piece (not including packaging) | 4.5 g                      |
| Weight per piece (including packaging)     | 5.69 g                     |
| Unit of weight                             | G                          |
| Customs number                             | 85366930                   |
| Country of origin                          | TN                         |

11737.1

STL 960/10/7,62-V-G GN

## Technical data

### Dimensions

|                            |          |
|----------------------------|----------|
| Length                     | 8.4 mm   |
| Length of the pin          | 3.9 mm   |
| Width                      | 74.38 mm |
| Width left                 | 2.9 mm   |
| Width right                | 2.9 mm   |
| Height                     | 12 mm    |
| Drill hole diameter        | 1.4 mm   |
| Diameter of connecting pin | 1 mm     |
| Pitch                      | 7.62 mm  |

### Ratings

|                       |       |
|-----------------------|-------|
| Rated voltage         | 400 V |
| Rated current         | 12 A  |
| Rated impulse voltage | 6 kV  |
| Overvoltage category  | III   |
| Contamination degree  | 3     |

### Connection data

|                        |                          |
|------------------------|--------------------------|
| Angle of PCB/contact   | 90° (vertically upwards) |
| Number of plug-in rows | 1                        |
| No. of poles           | 10                       |

### Materials

|                           |               |
|---------------------------|---------------|
| Insulation housing        | Polyamide 6.6 |
| Flammability class UL 94  | V-0           |
| Working temperature, min. | -30 °C        |
| Working temperature, max. | 105 °C        |
| Contact pin               | Copper alloy  |

11737.1

STL 960/10/7,62-V-G GN

---

## Technical data

---

### Further technical data

---

|                                           |                             |
|-------------------------------------------|-----------------------------|
| Storage temperature, min.                 | -40 °C                      |
| Storage temperature, max.                 | 105 °C                      |
| Insulation resistance                     | 1*10 <sup>13</sup> Ohm x cm |
| Creepage-current resistance               | CTI 600                     |
| Glow wire flammability index GWFI         | GWFI 850                    |
| GWFI after-glow time                      | 30 Sek.                     |
| Glow wire ignition temperature GWIT       | GWIT 775 °C                 |
| GWIT exposure time                        | 5 Sek.                      |
| Plug-in cycles acc. to standard           | 100                         |
| Recommended wave soldering temperature    | 265 °C                      |
| Recommended wave soldering duration, min. | 3 Sek.                      |
| Recommended wave soldering duration, max. | 4 Sek.                      |

### Print

---

|        |       |
|--------|-------|
| Colour | Green |
|--------|-------|

### Environmental Product Compliance

---

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2021-07-08 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

11737.1

STL 960/10/7,62-V-G GN

## Approvals

### cUL Recognized

|                               |                 |
|-------------------------------|-----------------|
| cUL approval                  | CSA 22.2 No.158 |
| cUL Usegroup B: rated voltage | 300 V           |
| cUL Usegroup B: rated current | 15 A            |
| cUL Usegroup C: rated voltage | 150 V           |
| cUL Usegroup C: rated current | 15 A            |
| cUL Usegroup D: rated voltage | 300 V           |
| cUL Usegroup D: rated current | 10 A            |
| cUL wire material             | Cu              |
| cUL Recognized                | yes             |

### UL Recognized

|                              |         |
|------------------------------|---------|
| UL approval                  | UL 1059 |
| UL Usegroup B: rated voltage | 300 V   |
| UL Usegroup B: rated current | 15 A    |
| UL Usegroup C: rated voltage | 150 V   |
| UL Usegroup C: rated current | 15 A    |
| UL Usegroup D: rated voltage | 300 V   |
| UL Usegroup D: rated current | 10 A    |
| UL wire material             | Cu      |
| UL factory wiring            | yes     |
| UL Recognized                | yes     |



### VDE approval

|                           |              |
|---------------------------|--------------|
| VDE approval              | DIN EN 61984 |
| VDE approval granted      | yes          |
| VDE rated voltage         | 400 V        |
| VDE rated current         | 12 A         |
| VDE rated impulse voltage | 6 kV         |
| VDE overvoltage category  | III          |
| VDE contamination degree  | 3            |

11737.1

STL 960/10/7,62-V-G GN

## Media

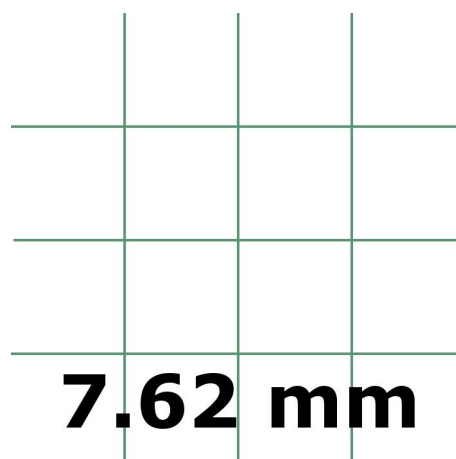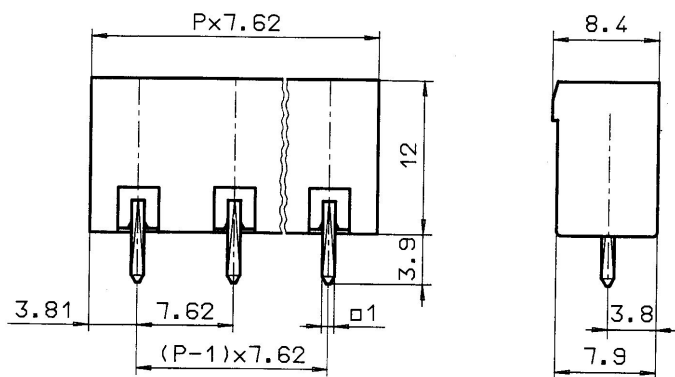

11737.1

STL 960/10/7,62-V-G GN

---

## Accessories

---