



Webeasy I/O analogue input module, 8 analogue inputs 0 - 10V, 0(4) - 20mA, NTC, RTD (PT1000 / NI1000),
Mounting type: Mounting rail TS 35, Supply voltage range: 20 - 28 VAC/DC

Business data

Article number	<u>15477.2</u>
Article name	WE-8AI
GTIN (EAN)	4044211124212
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	117 g
Weight per piece (including packaging)	157 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

Technical data

BUS data

Bus-Topologie / Kabellänge max.	multidrop line / 500m
Datenübertragungsrate / Bus-Teilnehmer max.	19k2 bps / 64
Bus protocol / interface	Modbus RTU / RS485, halb duplex, nicht isoliert

Dimensions

Length	95 mm
Width	53 mm
Height	60 mm


Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	6 mm
Torque	0.4 Nm

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

Media

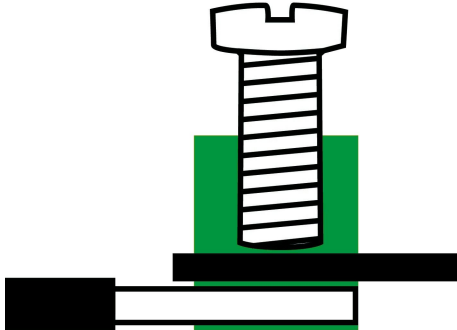

1	-	2	-	3	-	4	-	-
INTERNAL BUS	A1	WE-8AI				INTERNAL BUS	A1	-C
INTERNAL BUS	A2					INTERNAL BUS	A2	-C
INTERNAL BUS	A					INTERNAL BUS	A	-C
INTERNAL BUS	B					INTERNAL BUS	B	-C
5	-	6	-	7	-	8	-	-

Accessories
