

Data sheet

15984.2 WE-CON-R



Webeasy I/O connection module, Connecting interface from power supply and BUS cable to screw terminals, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

Article number	<u>15984.2</u>
Article name	WE-CON-R
GTIN (EAN)	4044211151614
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	86 g
Weight per piece (including packaging)	125 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

Technical data

BUS data

Bus-Topologie / Kabellänge max.	multidrop line / 500m
Datenübertragungsrate / Bus-Teilnehmer max.	19k2 bps / 64
Bus protocol / interface	Modbus RTU / RS485, halb duplex, nicht isoliert

Dimensions

Length	95 mm
Width	36 mm
Height	60 mm

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	6 mm
Torque	0.4 Nm

Environmental Product Compliance


REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

15984.2 WE-CON-R

Media

PE	PE	A1	A1	A2	A2	
24V AC/DC						
WE-CON (-R)				INTERNAL BUS	A1	↔
					A2	↔
					A	↔
					B	↔
BUS IN			BUS OUT			
A	B	A2	A2	B'	A'	

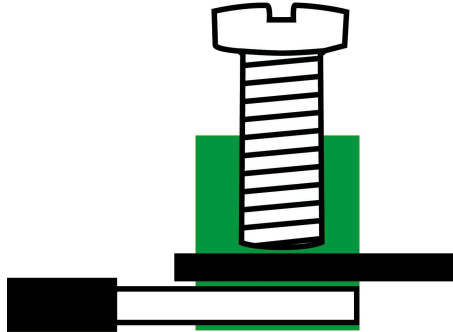

Accessories
