

Webeasy I/O light control module, 4 digital inputs, 2 relay outputs, If the bus connection fails, the outputs switch to preset, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	163 g
Weight per piece (including packaging)	203 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

Technical data


Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	6 mm
Torque	0.4 Nm

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2021-07-08
REACH Candidate Substance Note	No
RoHS Conform	yes

Media

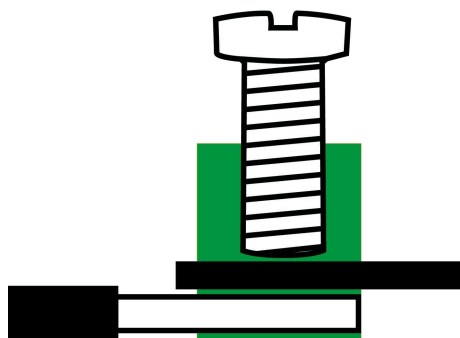

di1	di2	0V	di3	di4	0V	L1	⊕	N
						230V IN		
						WIELAND GST18/ SCREW (-ST)		
—	A1	INTERNAL BUS	WE-LIGHT (-ST)			INTERNAL BUS	A1	—C
—	A2						A2	—C
—	A						A	—C
—	B						B	—C
WIELAND GST18/ SCREW (-ST)						WIELAND GST18/ SCREW (-ST)		
230V OUTPUT-1						230V OUTPUT-2		
L1	⊕	N				L1	⊕	N

Accessories
