

# Data sheet

## 16117.2 WE-SUNBLIND



Webeasy I/O blinds control module, 4 digital inputs, 2 relay outputs, If the bus connection fails, the outputs switch to preset, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

### Business data

Article number	<u>16117.2</u>
Article name	WE-SUNBLIND
GTIN (EAN)	4044211207601
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	150 g
Weight per piece (including packaging)	190 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

### Technical data

#### BUS data

Bus-Topologie / Kabellänge max.	multidrop line / 500m
Datenübertragungsrate / Bus-Teilnehmer max.	19k2 bps / 64
Bus protocol / interface	Modbus RTU / RS485, halb duplex, nicht isoliert

#### Dimensions

Length	95 mm
Width	71 mm
Height	60 mm

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	6 mm
Torque	0.4 Nm


#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

# Data sheet

## 16117.2 WE-SUNBLIND

### Media

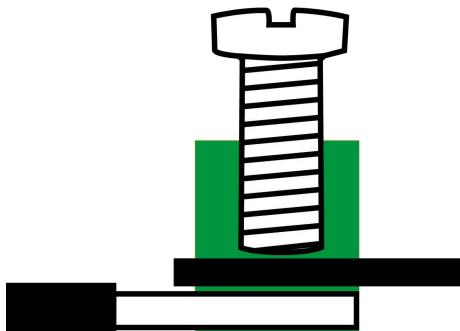

di1	di2	OV	L1	⊕	N
		230V IN			
		WIELAND GST18/ SCREW (-ST)			
INTERNAL BUS	A1	WE-SUNBLIND (-ST)			A1
INTERNAL BUS	A2				A2
INTERNAL BUS	A				A
INTERNAL BUS	B				B
		WIELAND GST18/ SCREW (-ST)			
		230V OUTPUT			
1	⊕	N	2		

---

### Accessories

---