

16159.2 WE-LIGHT-ST

| | | | | | | | | | | |
|-------------------------------|-----|----------------|-----|-----|----|-------------------------------|---|--------------|----|----|
| di1 | di2 | OV | di3 | di4 | OV | L1 | ⊕ | N | | |
| | | | | | | 230V IN | | | | |
| | | | | | | WIELAND GST18/ SCREW (-ST) | | | | |
| INTERNAL BUS | A1 | WE-LIGHT (-ST) | | | | | | INTERNAL BUS | A1 | -C |
| INTERNAL BUS | A2 | | | | | | | INTERNAL BUS | A2 | -C |
| INTERNAL BUS | A | | | | | | | INTERNAL BUS | A | -C |
| INTERNAL BUS | B | | | | | | | INTERNAL BUS | B | -C |
| WIELAND GST18/ SCREW (-ST) | | | | | | WIELAND GST18/ SCREW (-ST) | | | | |
| 230V OUTPUT-1 | | | | | | 230V OUTPUT-2 | | | | |
| L1 | ⊕ | N | | | | L1 | ⊕ | N | | |

Webeasy I/O Fancoil control module, 4 digital inputs, 3 relay outputs, If the bus connection fails, the outputs switch to preset, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

| | |
|--|-------------------|
| Article number | <u>16159.2</u> |
| Article name | WE-LIGHT-ST |
| GTIN (EAN) | 4044211207663 |
| Packaging unit | 1 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 163 g |
| Weight per piece (including packaging) | 203 g |
| Unit of weight | G |
| Customs number | 85423190 |
| Country of origin | NL |
| Product description | Controller module |

16159.2 WE-LIGHT-ST

Technical data

BUS data

| | |
|---|---|
| Bus-Topologie / Kabellänge max. | multidrop line / 500m |
| Datenübertragungsrate / Bus-Teilnehmer max. | 19k2 bps / 64 |
| Bus protocol / interface | Modbus RTU / RS485, halb duplex, nicht isoliert |

Dimensions

| | |
|--------|-------|
| Length | 95 mm |
| Width | 71 mm |
| Height | 60 mm |


Connection data

| | |
|--|---------------------|
| Connection principle | Screw connection |
| Wire cross-section single core (rigid), min. | 0.2 mm ² |
| Wire cross-section single-core (rigid), max. | 4 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 4 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm ² |
| Stripping length | 6 mm |
| Torque | 0.4 Nm |

Environmental Product Compliance

| | |
|--------------------------------|------------|
| REACH Conform | yes |
| REACH Reference date | 2024-01-23 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

Media

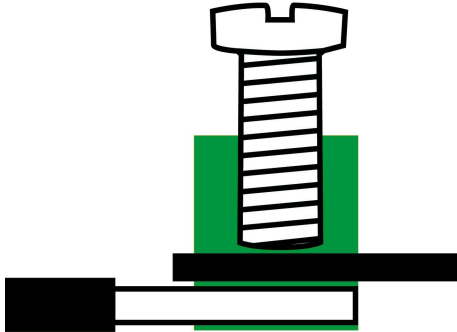

Accessories
