

Protective earth terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 50 mm², Width: 18.5 mm, Colour: Green-yellow

Business data

Article number	<u>17158.2</u>
Article name	SSL 50/2A GNYE
GTIN (EAN)	4044211186739
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	148 g
Weight per piece (including packaging)	158 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Product description	Protective earth terminal
Colour	Green-yellow

Technical data

Dimensions

Length	72.5 mm
Width	18.5 mm
Height TS 35/7.5	74 mm

Ratings

Rated cross-section	50 mm ²
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	10 mm ²
Wire cross-section single core (rigid)/stranded, max.	70 mm ²
Wire cross-section stranded, min.	10 mm ²
Wire cross-section stranded, max.	50 mm ²
Wire cross-section stranded with wire-end ferrules, min.	10 mm ²
Wire cross-section stranded with wire-end ferrules, max.	50 mm ²
Wire cross-section AWG, min.	8
Stripping length	24 mm
Screw head	Inner hex (Allen)
Screw threading	M 6
Tightening torque, min.	3.5 Nm
Tightening torque, max.	6 Nm
Wire cross-section single-core (rigid) / stranded, AWG min.	8
Wire cross-section stranded, AWG min.	8
Wire cross-section stranded with wire-end ferrules, AWG min.	8

Technical data

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	B10
Number of test pick-off options	1
Tightening torque, fastening screw max.	2 Nm
Tightening torque, fastening screw min.	4 Nm

Environmental Product Compliance

REACH Conform	Yes
REACH Reference date	2024-06-27
REACH Candidate Substance Note	No
RoHS Conform	Yes

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

cUL Recognized

cUL approval	C22.2 No 158
--------------	--------------

cUL wire cross-section stranded AWG, min.	8
---	---

cUL wire cross-section stranded AWG, max.	1/0
---	-----

cUL torque, min.	3.5 Nm
------------------	--------

cUL torque, max.	6 Nm
------------------	------

cUL wire material	Cu
-------------------	----

cUL File Number	E95701
-----------------	--------

cUL Recognized	1
----------------	---

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2:2009
--------------------	-------------------

KEMA KEUR approval granted	yes
----------------------------	-----

KEMA wire cross-section single core (rigid), min.	10 mm ²
---	--------------------

KEMA wire cross-section single-core (rigid), max.	70 mm ²
---	--------------------

KEMA wire cross-section stranded, min.	10 mm ²
--	--------------------

KEMA wire cross-section stranded, max.	70 mm ²
--	--------------------

KEMA torque, min.	3.5 Nm
-------------------	--------

KEMA torque, max.	6 Nm
-------------------	------

UL Recognized

UL approval	UL 1059
-------------	---------

UL wire cross-section stranded AWG, min.	8
--	---

UL wire cross-section stranded AWG, max.	1/0
--	-----

UL torque, min.	30.9 Lb In.
-----------------	-------------

UL torque, max.	53.1 Lb In.
-----------------	-------------

UL wire material	Cu
------------------	----

UL factory wiring	1
-------------------	---




UL field wiring	1
-----------------	---

UL File Number	E95701
----------------	--------

UL Recognized	1
---------------	---

Media

M6

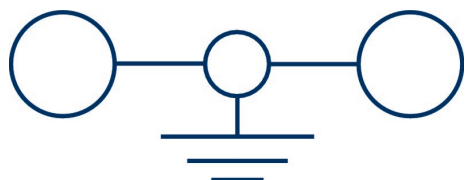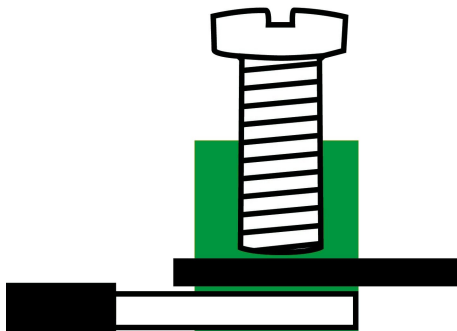

EAC



Accessories

Cover

Cover, Length: 51.5 mm, Width: 18 mm, Colour: White



Article number	Article name	GTIN (EAN)	Packaging unit
<u>17284.7</u>	SAD 1/18/B WH	4044211205539	10 ST

Cover, Length: 51.5 mm, Width: 18 mm, Colour: Yellow



Article number	Article name	GTIN (EAN)	Packaging unit
<u>17283.8</u>	SAD 1/18/B YE	4044211205522	10 ST

Measurement pick-off terminal

Measurement pick-off terminal, Screw connection, Mounting type: On base, Rated cross-section: 10 mm², Width: 10 mm, Colour: Beige



Article number	Article name	GTIN (EAN)	Packaging unit
<u>1121.2</u>	MAG 50 BG	4044211080914	10 ST

Inlay profile

Inlay plate, Colour: natural



Article number	Article name	GTIN (EAN)	Packaging unit
<u>2274.0</u>	EP 50	4044211050818	10 ST

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 8 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>9323.7</u>	PMC SB 8/40 WH	4044211129231	400 ST

Allen key socket wrench



Inner hex key with bare blade

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2818.0</u>	ISKS 5	4044211055448	1 ST