


17204.8

SQI 2,5/5 YE

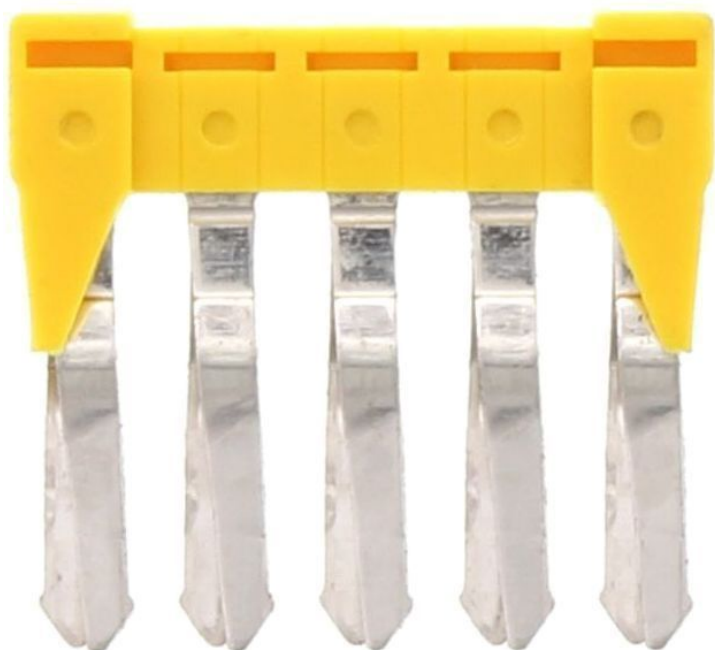

Insulated cross-connector, No. of poles: 5, Mounting type: Plug in, Width: 25.2 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

**RAL:** 1026

## Business data

Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	3 g
Weight per piece (including packaging)	3.4 g
Unit of weight	G
Customs number	85389099
Country of origin	DE
Prio-Article	17204.8
Product description	Insulated cross-connector

17204.8

SQI 2,5/5 YE

---

## Technical data

---

### Dimensions

---

Length	4 mm
Width	25.2 mm
Height	23 mm
Pitch size	5 mm

---

### Ratings

---

Voltage with partition, max.	1000 V
Voltage without partition, max.	1000 V
Rated current	24 A
Current load, max.	32 A
Rated cross-section	2.5 mm <sup>2</sup>
Contamination degree	2

---

### Connection data

---

No. of poles	5
--------------	---

---

### Materials

---

Material	Bronze
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

---

### Further technical data

---

Mounting type	Plug in
Insulation available	✓
Touch protection is available	✓
Number of bridged terminals	5

---

### Print

---

Colour	Yellow
--------	--------

---

17204.8

SQI 2,5/5 YE

---

## Technical data

---

### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2021-07-08
REACH Candidate Substance Note	No
RoHS Conform	yes

---

17204.8

SQI 2,5/5 YE

---

## Accessories

---

### Insulation cap for cross-connector

---



Insulating cap, Colour: Yellow

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
17200.8	SQIK 2,5-10 YE	4044211148539	20

---