


Data sheet

2698.5 AP 2,5/I BU

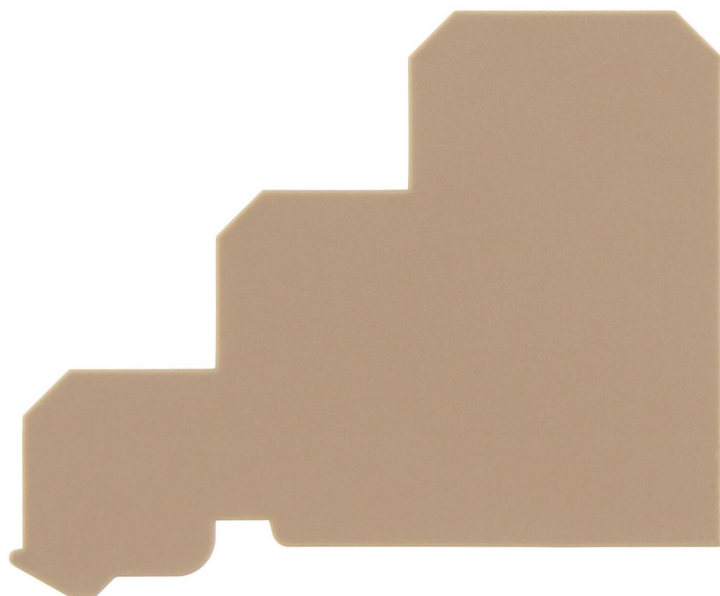

End plate, Colour: Blue

RAL: Ähnlich 5005

Business data

| | |
|--|---------------|
| Article number | <u>2698.5</u> |
| Article name | AP 2,5/I BU |
| GTIN (EAN) | 4044211054380 |
| Packaging unit | 20 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 3.5 g |
| Weight per piece (including packaging) | 3.6 g |
| Unit of weight | G |
| Customs number | 85389099 |
| Country of origin | DE |
| Prio-Article | 2698.2 |
| Product description | End plate |

Technical data

Dimensions

| | |
|--------|----------|
| Length | 59.85 mm |
|--------|----------|

Materials

| | |
|----------|---------------|
| Material | Polyamide 6.6 |
|----------|---------------|

| | |
|--------------------------|-----|
| Flammability class UL 94 | V-2 |
|--------------------------|-----|

| | |
|---------------------------|--------|
| Working temperature, min. | -40 °C |
|---------------------------|--------|

| | |
|---------------------------|--------|
| Working temperature, max. | 105 °C |
|---------------------------|--------|

Further technical data

| | |
|-----------------------|---|
| Designed as end plate | ✓ |
|-----------------------|---|

| | |
|-------------------|---|
| Snap-on available | ✓ |
|-------------------|---|

Environmental Product Compliance

| | |
|--------------------------------|----|
| REACH Candidate Substance Note | No |
|--------------------------------|----|

Data sheet


2698.5 AP 2,5/I BU



Media


Accessories

##INVERSE##CONTA-CONNECT




Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|------------------------|------------------------------|---------------|----------------|
| 1271.2 | IK 2,5 PNP/DC/LED(RD)/48V BG | 4044211037512 | 100 ST |



Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|------------------------|--------------|---------------|----------------|
| 1260.2 | IK 2,5 BG | 4044211035228 | 100 ST |




Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|------------------------|------------------------------|---------------|----------------|
| 1263.2 | IK 2,5 PNP/DC/LED(GN)/24V BG | 4044211035860 | 100 ST |




Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|------------------------|------------------------------|---------------|----------------|
| 1274.2 | IK 2,5 PNP/DC/LED(GN)/60V BG | 4044211037628 | 100 ST |



Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige


| Article number | Article name | GTIN (EAN) | Packaging unit |
|------------------------|-------------------------------|---------------|----------------|
| 1275.2 | IK 2,5 PNP/AC/LED(RD)/220V BG | 4044211037734 | 100 ST |



Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige


| Article number | Article name | GTIN (EAN) | Packaging unit |
|------------------------|------------------------------|---------------|----------------|
| 1280.2 | IK 2,5 NPN/DC/LED(GN)/60V BG | 4044211038373 | 100 ST |

##INVERSE##CONTA-CONNECT




Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|-------------------------------|---------------|----------------|
| <u>1282.2</u> | IK 2,5 NPN/AC/LED(GN)/220V BG | 4044211038663 | 100 ST |




Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------------|---------------|----------------|
| <u>1264.2</u> | IK 2,5 NPN/DC/LED(RD)/24V BG | 4044211036072 | 100 ST |




Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------------|---------------|----------------|
| <u>1277.2</u> | IK 2,5 NPN/DC/LED(RD)/48V BG | 4044211037918 | 100 ST |




Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------------|---------------|----------------|
| <u>1278.2</u> | IK 2,5 NPN/DC/LED(GN)/48V BG | 4044211038021 | 100 ST |



Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|-------------------------------|---------------|----------------|
| <u>1281.2</u> | IK 2,5 NPN/AC/LED(RD)/220V BG | 4044211038557 | 100 ST |



Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------------|---------------|----------------|
| <u>1262.2</u> | IK 2,5 PNP/DC/LED(RD)/24V BG | 4044211035655 | 100 ST |

##INVERSE##CONTA-CONNECT



Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------------|---------------|----------------|
| <u>1265.2</u> | IK 2,5 NPN/DC/LED(GN)/24V BG | 4044211036287 | 100 ST |




Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------------|---------------|----------------|
| <u>1272.2</u> | IK 2,5 PNP/DC/LED(GN)/48V BG | 4044211037567 | 100 ST |




Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------------|---------------|----------------|
| <u>1276.2</u> | IK 2,5 PNP/AC/LED(GN)220V BG | 4044211037840 | 100 ST |



Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|-------------------------------|---------------|----------------|
| <u>1279.2</u> | IK 2,5 NPN/DC/LED(RD)/ 60V BG | 4044211038168 | 100 ST |



Three-level initiator terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------------|---------------|----------------|
| <u>1273.2</u> | IK 2,5 PNP/DC/LED(RD)/60V BG | 4044211037574 | 100 ST |