

Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 16 mm<sup>2</sup>, Width: 12.1 mm, Colour: Green-yellow

### Business data

Article number	<u>27033.2</u>
Article name	PSL 16/3A GNYE
GTIN (EAN)	4044211224202
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	56.64 g
Weight per piece (including packaging)	59.64 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Product description	Protective earth terminal
Colour	Green-yellow

### Technical data

#### Dimensions

Length	100 mm
Width	12.1 mm
Height	48 mm
Height TS 35/7.5	49.5 mm

#### Ratings

Rated cross-section	16 mm <sup>2</sup>
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

#### Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	3
Number of terminals per level	3
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	25 mm <sup>2</sup>
Wire cross-section stranded, min.	0.5 mm <sup>2</sup>
Wire cross-section stranded, max.	16 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	16 mm <sup>2</sup>
Wire cross-section AWG, min.	20
Wire cross-section AWG, max.	4
Stripping length	18 mm

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

---

### Technical data

---

#### Further technical data

Mounting type	Mounting rail TS 35/7,5 and TS 35/15
Gauge plug acc. to EN 60 947-1	A7
Number of cross-connection channels	1
End plate required	✓

#### Environmental Product Compliance

REACH Conform	Yes
REACH Reference date	2024-06-27
REACH Candidate Substance Note	No
RoHS Conform	Yes

---

### Approvals

---

#### Standards and regulations

---

EAC approval	TR ZU 004/2011
--------------	----------------

---

EAC approval applied for	yes
--------------------------	-----

---

#### KEMA KEUR approval

---

KEMA KEUR approval	EN 60947-7-2:2009
--------------------	-------------------

---

KEMA KEUR approval applied for	yes
--------------------------------	-----

---

#### UL Recognized

---



UL approval	UL 1059
-------------	---------

---

UL Recognized applied for	1
---------------------------	---

---

### Media

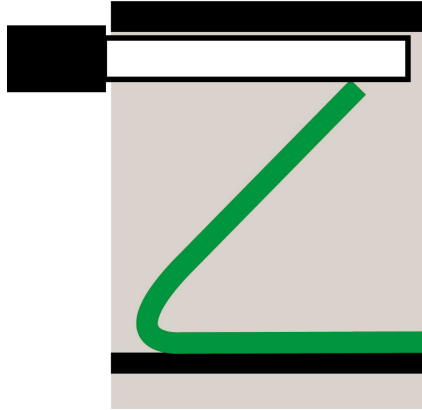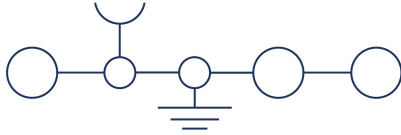

**EAC**


### Accessories

#### End plate

End plate, Width: 1.5 mm, Colour: Grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>27116.6</u>	PAP 16/3A GR	4044211225094	20

#### End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3748.2</u>	ZES 35 BG	4044211060572	50

#### Test plug



Test plug, Colour: Red

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2007.0</u>	PS 2,3	4044211048105	20 ST

#### Insulated cross-connector



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 20.6 mm, Colour: Red

Article number	Article name	GTIN (EAN)	Packaging unit
<u>27172.9</u>	PQI 16/2 RD	4044211225469	20

#### Screwdriver

## 27033.2 PSL 16/3A GNYE

Screwdriver with bare blade, Colour: Black-grey



Article number	Article name	GTIN (EAN)	Packaging unit
<u>1085.0</u>	SDB 0,5x3,0	4044211014643	1 ST

## ##INVERSE##CONTA-CONNECT

End plate, Width: 1.5 mm, Colour: Grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>27116.6</u>	PAP 16/3A GR	4044211225094	20