


Data sheet

27124.9 PQI 1,5/4 RD

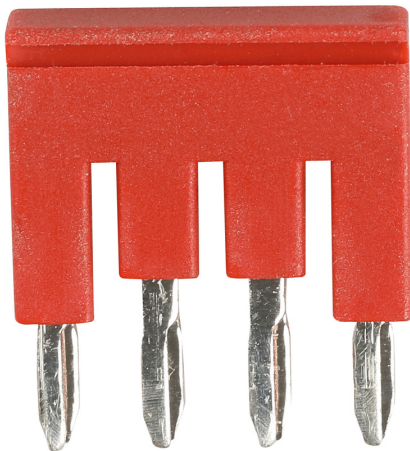

Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 13.1 mm, Colour: Red

Business data

Article number	27124.9
Article name	PQI 1,5/4 RD
GTIN (EAN)	4044211225186
Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	1.32 g
Weight per piece (including packaging)	1.44 g
Unit of weight	G
Customs number	85389099
Country of origin	DE
Prio-Article	27124.9
Product description	Insulated cross-connector

Technical data

Dimensions

Length	3.2 mm
Width	13.1 mm
Height	14.5 mm
Pitch size	3.5 mm

Ratings

Max. voltage	500 V
Rated current	17.5 A
Current load, max.	17,5 A
Rated cross-section	1.5 mm ²
Contamination degree	3

Connection data

No. of poles	4
--------------	---

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

Further technical data

Mounting type	Plug in
Insulation available	✓
Touch protection is available	✓
Number of bridged terminals	4


Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Media

Accessories

##INVERSE##CONTA-CONNECT




Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5,
Rated cross-section: 1.5 mm², Width: 3.5 mm, Colour: Green-yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>27001.2</u>	PSL 1,5/2A GNYE	4044211223687	50 ST



Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5,
Rated cross-section: 1.5 mm², Width: 3.5 mm, Colour: Green-yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>27003.2</u>	PSL 1,5/3A GNYE	4044211223724	50 ST



Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5,
Rated cross-section: 1.5 mm², Width: 3.5 mm, Colour: Green-yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>27005.2</u>	PSL 1,5/4A GNYE	4044211223762	50 ST