

Insulated cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 13.6 mm, Colour: Yellow

**RAL:** 1026

### Business data

Article number	<u>2750.2</u>
Article name	QI 2 YE
GTIN (EAN)	4044211054861
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	4.52 g
Weight per piece (including packaging)	4.54 g
Unit of weight	G
Customs number	85389099
Country of origin	CZ
Product description	Insulated cross-connector
Colour	Yellow

### Technical data

#### Dimensions

Length	2.4 mm
Width	13.6 mm
Pitch size	8 mm

#### Ratings

Voltage with partition, max.	800 V
Voltage without partition, max.	400 V
Rated current	57 A
Contamination degree	3

#### Connection data

No. of poles	2
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

#### Materials

Material	Copper
Surface	Tin-plated
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

#### Further technical data

Mounting type	Screwable
Insulation available	✓
Number of bridged terminals	2

---

### Technical data

---

#### Environmental Product Compliance

---


REACH Conform	No
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
REACH CAS 1 Substance	LEAD
REACH CAS 1 Percent minimal	0.1 %
REACH CAS 1 Percent maximum	4 %
REACH CAS 1 Number	7439-92-1
RoHS Conform	yes
RoHS Exception rule	6c
SCIP	ee9de62e-a6c2-4562-851c-c223bdf26287

---

---

Media

---

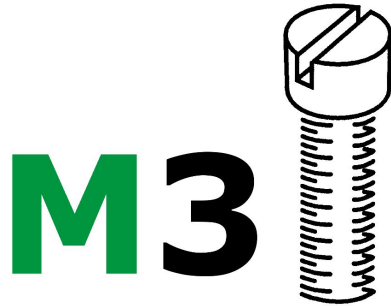

---

### Accessories

---

#### Screwdriver

---

Screwdriver with bare blade, Colour: Black-grey



Article number	Article name	GTIN (EAN)	Packaging unit
<u>1086.0</u>	SDB 0,6x3,5	4044211014797	1 ST

---