



Insulated cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 21.7 mm, Colour: Yellow

**RAL:** 1026

## Business data

Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	6.96 g
Weight per piece (including packaging)	6.99 g
Unit of weight	G
Customs number	85389099
Country of origin	CZ
Product description	Insulated cross-connector

2751.2

QI 3 YE

---

## Technical data

---

### Dimensions

---

Length	2.4 mm
Width	21.7 mm
Pitch size	8 mm

---

### Ratings

---

Voltage with partition, max.	800 V
Voltage without partition, max.	400 V
Rated current	57 A
Contamination degree	3

---

### Connection data

---

No. of poles	3
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

---

### Materials

---

Material	Copper
Surface	Tin-plated
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

---

### Further technical data

---

Mounting type	Screwable
Insulation available	✓
Number of bridged terminals	3

---

### Print

---

Colour	Yellow
--------	--------

---

2751.2

QI 3 YE

---

## Technical data

---

### Environmental Product Compliance

---

REACH Conform	No
REACH Reference date	2021-07-08
REACH Candidate Substance Note	No
REACH CAS 1 Substance	LEAD
REACH CAS 1 Percent minimal	0.1 %
REACH CAS 1 Percent maximum	4 %
REACH CAS 1 Number	7439-92-1
RoHS Conform	yes
RoHS Exception rule	6c

---

2751.2


QI 3 YE

---

Media

---

**M3**

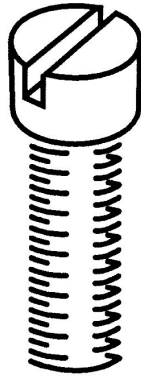

2751.2  
QI 3 YE

---

## Accessories

---

### Screwdriver

---



Screwdriver with bare blade, Colour: Black-grey

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 ST

---