



Cable entry with injected seal, Mounting type: Screws, Length: 73 mm, Width: 39 mm, IP 66, Colour: Black

RAL: 9005

Business data

Article number	<u>28700.4</u>
Article name	KDS-SR-FB1/A BK
GTIN (EAN)	4044211225476
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	28.2 g
Weight per piece (including packaging)	31.7 g
Unit of weight	G
Customs number	39259020
Country of origin	DE
Product description	Cable Entry
Colour	Black

Technical data

Dimensions

Length	73 mm
Length of wall cutout	46 mm
Width	39 mm
Width of wall cutout	24 mm
Height	19 mm
Installation height	18.9 mm
Diameter of the screw holes	5.5 mm

Materials

Material	Polyamide 6.6
Glass-fibre reinforced	✓
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C
Sealing material	TPE
Halogen-free	✓
Silicone-free	✓


Further technical data

Mounting type	Screws
Degree of protection	IP66
Number of screw holes	2
Fixing screws	M 5 (ISO 4762 / DIN 912)
Torque of the fixing screws	3 Nm

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

Media

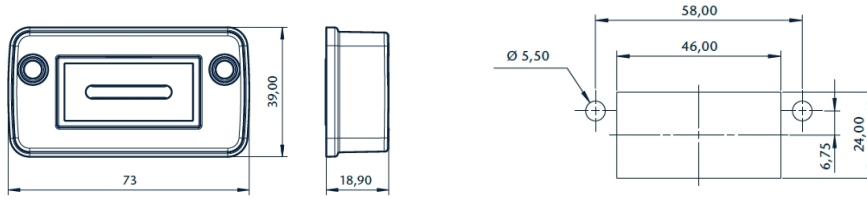

Accessories

Flat cable seals



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28717.6</u>	KDS-DE-FB1/E GR	4044211221102	5 ST



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28718.6</u>	KDS-DE-FB1/F GR	4044211221119	5 ST



Seal dummy, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28713.6</u>	KDS-DE-FB1/A GR	4044211221065	5 ST



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28714.6</u>	KDS-DE-FB1/B GR	4044211221072	5 ST



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28715.6</u>	KDS-DE-FB1/C GR	4044211221089	5 ST



Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28716.6</u>	KDS-DE-FB1/D GR	4044211221096	5 ST

Actuating tool

28700.4 KDS-SR-FB1/A BK



Using the KDS BW1 actuating tool, the seals can be conveniently mounted in and dismantled from the frame. The ergonomic grip and the special shape enable simple and precise installations, especially for cabling applications in confined spaces., Material: Polyamide

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28622.0</u>	KDS BW 1	4044211216597	1 ST

Sheet-metal puncher



Sheet metal puncher for rectangular openings, Dimensions opening: 46 x 24 mm, Maximum wall thickness: 2.0 mm for stainless steel sheet, Material: steel

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28734.0</u>	BL KDS-FB1	4044211221805	1 ST



Sheet metal puncher for rectangular openings, Dimensions opening: 46 x 24 mm, Maximum wall thickness: 2.0 mm for stainless steel sheet, Material: steel

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28729.0</u>	BL-VA KDS-FB1	4044211221768	1 ST

EMC brackets



Shield-connection rail enabling mounting of shield connection clips directly on cable entry system KDS, Mounting type: Screw, Length: 35,3 mm, Width: 68 mm, Height: 16 mm, Profile: 10x3 mm

Article number	Article name	GTIN (EAN)	Packaging unit
<u>28623.0</u>	KDS-EMV-SAB 1-4	4044211219628	1 ST

##INVERSE##CONTA-CABLE

28700.4 KDS-SR-FB1/A BK

Seal, Mounting type: Plug in, Length 42.7 mm, Width: 20.3 mm, IP 66, Colour: Grey



Article number	Article name	GTIN (EAN)	Packaging unit
<u>28716.6</u>	KDS-DE-FB1/D GR	4044211221096	5 ST