


3712.9

ZQI 2,5/4 RD

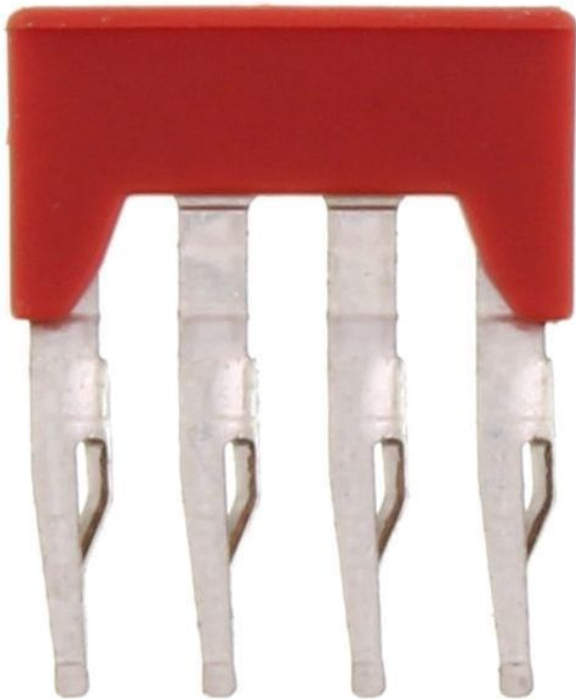

Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 19.3 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Red

## Business data

Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	2.26 g
Weight per piece (including packaging)	2.36 g
Unit of weight	G
Customs number	85389099
Country of origin	CZ
Prio-Article	3712.8
Product description	Insulated cross-connector

**3712.9**

**ZQI 2,5/4 RD**

---

## Technical data

---

### Dimensions

---

Length	4.5 mm
Width	19.3 mm
Pitch size	5 mm

---

### Ratings

---

Voltage with partition, max.	800 V
Voltage without partition, max.	800 V
Rated current	24 A
Rated cross-section	2.5 mm <sup>2</sup>
Contamination degree	3

---

### Connection data

---

No. of poles	4
--------------	---

---

### Materials

---

Material	Copper alloy
Surface	Tin-plated
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

---

### Further technical data

---

Mounting type	Plug in
Insulation available	✓
Touch protection is available	✓
Number of bridged terminals	4

---

### Print

---

Colour	Red
--------	-----

---

3712.9

ZQI 2,5/4 RD

---

## Technical data

---

### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2021-07-08
REACH Candidate Substance Note	No
RoHS Conform	yes

---

3712.9

ZQI 2,5/4 RD

---

## Accessories

---