


3713.4

ZQI 2,5/5 BK

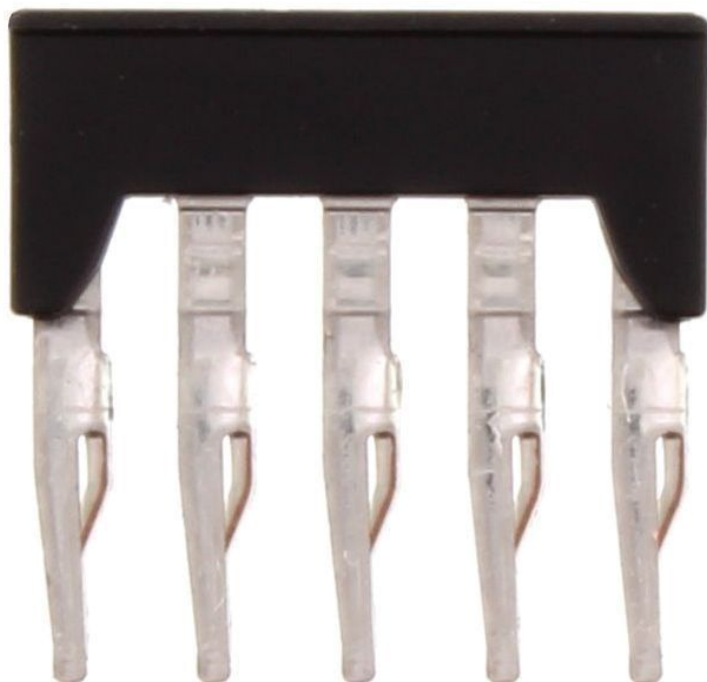

Insulated cross-connector, No. of poles: 5, Mounting type: Plug in, Width: 24.4 mm, Rated cross-section: 2.5 mm², Colour: Black

RAL: 9005

Business data

Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	2.8 g
Weight per piece (including packaging)	2.9 g
Unit of weight	G
Customs number	85389099
Country of origin	CZ
Prio-Article	3713.8
Product description	Insulated cross-connector

3713.4

ZQI 2,5/5 BK

Technical data

Dimensions

Length	4.5 mm
Width	24.4 mm
Pitch size	5 mm

Ratings

Voltage with partition, max.	800 V
Voltage without partition, max.	800 V
Rated current	24 A
Rated cross-section	2.5 mm ²
Contamination degree	3

Connection data

No. of poles	5
--------------	---

Materials

Material	Copper alloy
Surface	Tin-plated
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

Further technical data

Mounting type	Plug in
Insulation available	✓
Touch protection is available	✓
Number of bridged terminals	5

Print

Colour	Black
--------	-------

3713.4

ZQI 2,5/5 BK

Technical data

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2021-07-08
REACH Candidate Substance Note	No
RoHS Conform	yes

3713.4

ZQI 2,5/5 BK

Accessories
