


## 7888.2 EG-ZME/24VACDC 3-30s

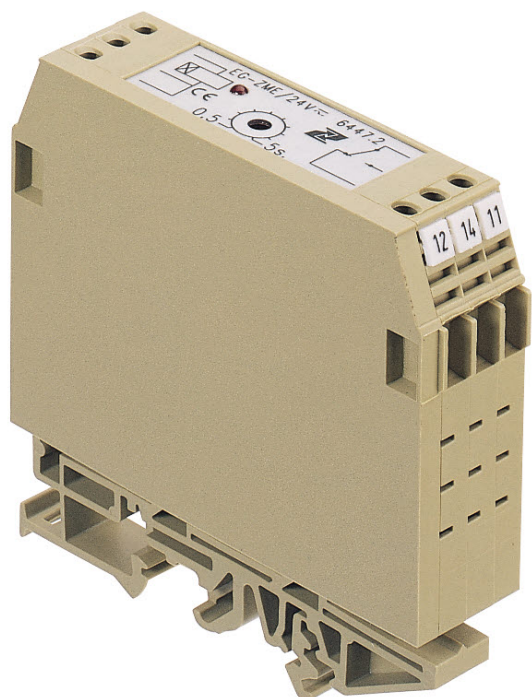

On-delay timing relay, time range: 3 s to 30 s, Screw connection, Mounting type: Mounting rail TS 35, 1 CO contact, Supply voltage: 24 VAC/DC

### Business data

Article number	<u>7888.2</u>
Article name	EG-ZME/24VACDC 3-30s
GTIN (EAN)	4044211078232
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	64 g
Weight per piece (including packaging)	74.59 g
Unit of weight	G
Customs number	85364900
Country of origin	NL
Product description	Timing relay

### Technical data

#### Dimensions

Length	78 mm
Width	22.5 mm
Height TS 35 / 7.5 with BA	84 mm

#### Ratings

Overvoltage category	III
Contamination degree	2

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	2.5 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	7 mm

#### Input data

Power supply AC/DC	24 V
--------------------	------

#### Output data

Relay contact	1 CO contact
---------------	--------------

#### Materials

Working temperature, max.	50 °C
---------------------------	-------

#### Further technical data

Protection class	IP20
Status display	✓

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

---

### Media

---

---

### Accessories

---