


1117.2 SST/SIK/2 LED`s(RD)/24V DC

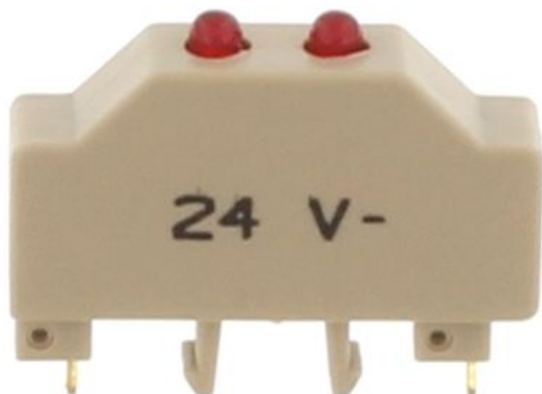

Status display, Display: LED, Mounting type: Plug in, Colour: Beige

Business data

| | |
|--|----------------------------|
| Article number | <u>1117.2</u> |
| Article name | SST/SIK/2 LED`s(RD)/24V DC |
| GTIN (EAN) | 4044211018047 |
| Packaging unit | 10 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 1.8 g |
| Weight per piece (including packaging) | 2.4 g |
| Unit of weight | G |
| Customs number | 85389099 |
| Country of origin | DE |
| Product description | Status display |
| Colour | Beige |

1117.2 SST/SIK/2 LED`s(RD)/24V DC

Technical data

Connection data

| | |
|----------------------|---------|
| Connection principle | Plug in |
|----------------------|---------|

Materials

| | |
|--------------------|---------------|
| Insulation housing | Polyamide 6.6 |
|--------------------|---------------|

| | |
|--------------------------|-----|
| Flammability class UL 94 | V-2 |
|--------------------------|-----|

| | |
|---------------------------|--------|
| Working temperature, min. | -40 °C |
|---------------------------|--------|

| | |
|---------------------------|--------|
| Working temperature, max. | 105 °C |
|---------------------------|--------|

Further technical data

| | |
|---------------|---------|
| Mounting type | Plug in |
|---------------|---------|

| | |
|--------------------|---|
| End plate required | ✓ |
|--------------------|---|

| | |
|-----------------------------|---------|
| Voltage illuminated display | 24 DC V |
|-----------------------------|---------|

| | |
|---------------------------------------|--------|
| Cross-current via illuminated display | < 5 mA |
|---------------------------------------|--------|

| | |
|--|-----|
| Type of display element (defect display) | LED |
|--|-----|

| | |
|---------------------------------------|----|
| Supply voltage (defect display), max. | 24 |
|---------------------------------------|----|

| | |
|----------------------------------|----|
| Type of voltage (defect display) | DC |
|----------------------------------|----|

| | |
|----------------|-----|
| Colour of lamp | Red |
|----------------|-----|

Environmental Product Compliance

| | |
|---------------|-----|
| REACH Conform | yes |
|---------------|-----|

| | |
|----------------------|------------|
| REACH Reference date | 2024-01-23 |
|----------------------|------------|

| | |
|--------------------------------|----|
| REACH Candidate Substance Note | No |
|--------------------------------|----|

| | |
|--------------|-----|
| RoHS Conform | yes |
|--------------|-----|

Approvals

Standards and regulations

| | |
|--------------|----------------|
| EAC approval | TR ZU 004/2011 |
|--------------|----------------|

| | |
|----------------------|-----|
| EAC approval granted | yes |
|----------------------|-----|

Media

EAC

1117.2 SST/SIK/2 LED`s(RD)/24V DC


Accessories

Terminal blocks




Fused terminal with disconnect plug, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 10 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>17043.2</u> | SIK 10/Z/ST BG | 4044211155810 | 25 ST |



Fused terminal with disconnect plug, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 8 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>17042.2</u> | SIK 10/ST BG | 4044211155797 | 25 |



Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 8 mm, Colour: Beige


| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>1101.2</u> | SIK 10 BG | 4044211016388 | 50 |



Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 10 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>1102.2</u> | SIK 10/Z BG | 4044211016395 | 25 ST |

##INVERSE##CONTA-CONNECT




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 8 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>1101.2</u> | SIK 10 BG | 4044211016388 | 50 |

1117.2 SST/SIK/2 LED`s(RD)/24V DC

##INVERSE##CONTA-CONNECT



Fused terminal with disconnect plug, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 8 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>17042.2</u> | SIK 10/ST BG | 4044211155797 | 25 |




Fuse-disconnect terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 10 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>1102.2</u> | SIK 10/Z BG | 4044211016395 | 25 ST |



Fuse-disconnect terminal, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 10 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>1102.2</u> | SIK 10/Z BG | 4044211016395 | 25 ST |



Fused terminal with disconnect plug, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 8 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|-------------------|---------------|----------------|
| <u>17044.2</u> | SIK 10/ST/5x20 BG | 4044211155827 | 25 ST |