# Data sheet 1416.2 DLIS 2,5 L BG





Three-wire installation terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 6 mm, Colour: Beige

#### **Business data**

| Dusiness uata                              |                                   |
|--------------------------------------------|-----------------------------------|
| Article number                             | 1416.2                            |
| Article name                               | DLIS 2,5 L BG                     |
| GTIN (EAN)                                 | 4044211044619                     |
| Packaging unit                             | 50                                |
| Quantity unit                              | PC                                |
| Weight per piece (not including packaging) | 9.4 g                             |
| Weight per piece (including packaging)     | 10.76 g                           |
| Unit of weight                             | G                                 |
| Customs number                             | 85369010                          |
| Country of origin                          | CZ                                |
| Product description                        | Three-wire installation terminals |
| Colour                                     | Beige                             |





| Technical data                                           |                     |
|----------------------------------------------------------|---------------------|
| Dimensions                                               |                     |
| Length                                                   | 90.5 mm             |
| Width                                                    | 6 mm                |
| Height TS 35/7.5                                         | 53 mm               |
| Ratings                                                  |                     |
| Rated voltage                                            | 400 V               |
| Rated current                                            | 24 A                |
| Rated cross-section                                      | 2.5 mm²             |
| Rated impulse voltage                                    | 4 kV                |
| Overvoltage category                                     | III                 |
| Contamination degree                                     | 3                   |
| Maximum power dissipation for nominal condition          | 0.77 W              |
| Connection data                                          |                     |
| Connection principle                                     | Screw connection    |
| Connection position                                      | Lateral             |
| Connections                                              | 2                   |
| Number of potentials                                     | 1                   |
| Wire cross-section single-core (rigid) / stranded, min.  | 0.2 mm <sup>2</sup> |
| Wire cross-section single core (rigid)/stranded, max.    | 4 mm²               |
| Wire cross-section stranded, min.                        | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded, max.                        | 4 mm²               |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm <sup>2</sup> |
| Wire cross-section AWG, min.                             | 22                  |
| Wire cross-section AWG, max.                             | 14                  |
| Stripping length                                         | 8 mm                |
| Screw head                                               | Slotted             |
| Screw threading                                          | M 2,5               |
| Tightening torque, min.                                  | 0.4 Nm              |
| Tightening torque, max.                                  | 0.8 Nm              |






| Technical data                          |                         |
|-----------------------------------------|-------------------------|
| Materials                               |                         |
| Insulation housing                      | Polyamide 6.6           |
| Flammability class UL 94                | V-2                     |
| Working temperature, min.               | -40 °C                  |
| Working temperature, max.               | 105 °C                  |
| Further technical data                  |                         |
| Mounting type                           | Mounting rail TS 35/7,5 |
| Gauge plug acc. to EN 60 947-1          | A3                      |
| Number of cross-connection channels     | 1                       |
| End plate required                      | ✓                       |
| <b>Environmental Product Compliance</b> |                         |
| REACH Conform                           | yes                     |
| REACH Reference date                    | 2023-06-14              |
| REACH Candidate Substance Note          | No                      |
| RoHS Conform                            | yes                     |





#### Media

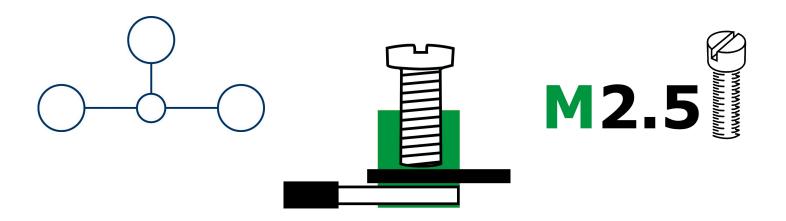

### 1416.2 DLIS 2,5 L BG



#### **Accessories**

#### **End plate**



End plate, Width: 1.5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| 2829.2         | AP 2,5/S BG  | 4044211055554 | 20 ST          |

#### **End stop**



End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige

| Article number | Article name  | GTIN (EAN)    | Packaging unit |
|----------------|---------------|---------------|----------------|
| 2828.0         | ES 35/K/ST BG | 4044211055547 | 50             |

#### **Cross-connector**



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 16.6 mm, Rated cross-section: 2.5 mm², Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging<br>unit |
|----------------|--------------|---------------|-------------------|
| 2833.0         | Q 3          | 4044211055585 | 50 ST             |



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 22.7 mm, Rated cross-section: 2.5 mm², Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| 2834.0         | Q 4          | 4044211055592 | 20 ST          |

Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 59.3 mm, Rated cross-section: 2.5 mm², Colour: natural

| (1) | 150 | 863 | (33) | 1953 | 120 | 1323 | 120 | 150 | CV) |
|-----|-----|-----|------|------|-----|------|-----|-----|-----|
| ł   | ă   |     |      |      |     |      |     |     | i   |
| 4   | *   | d.  |      | *    | 4   | 1111 | 9   |     |     |

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| 2835.0         | Q 10         | 4044211055608 | 10 ST          |

### 1416.2 DLIS 2,5 L BG



#### **Cross-connector**

Cross-connector, No. of poles: 20, Mounting type: Can be screwed on, Width: 120.3 mm, Rated cross-section: 2.5 mm², Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| 2836.0         | Q 20         | 4044211055615 | 10 ST          |

Cross-connector, No. of poles: 82, Mounting type: Screwable, Width: 500 mm, Rated cross-section: 2.5 mm², Colour: natural

| Article number | Article name    | GTIN (EAN)    | Packaging unit |
|----------------|-----------------|---------------|----------------|
| 2154.0         | Q 0,5 m/82 Pole | 4044211049751 | 1 ST           |



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 10.5 mm, Rated cross-section: 2.5 mm², Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| 2832.0         | Q 2          | 4044211055578 | 50 ST          |

#### **Quick marking**



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White

| Article number | Article name   | GTIN (EAN)    | Packaging<br>unit |
|----------------|----------------|---------------|-------------------|
| 4702.7         | PMC SB 6/50 WH | 4044211089986 | 500 ST            |

#### **Screwdriver**

Screwdriver with bare blade, Colour: Black-grey



| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| 1085.0         | SDB 0,5x3,0  | 4044211014643 | 1 ST           |

#### Insulation plate

# Data sheet 1416.2 DLIS 2,5 L BG





Insulation plate, Colour: Beige

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| 2566.2         | TRS 3 BG     | 4044211053567 | 100 ST         |