

Data sheet

15387.2 USB-AB



Interface module for USB type A and USB type B, Unshielded, Screw connection and USB connector,
Mounting type: Mounting rail TS 35, No. of poles: 4

Business data

Article number	15387.2
Article name	USB-AB
GTIN (EAN)	4044211133030
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	32 g
Weight per piece (including packaging)	54 g
Unit of weight	G
Customs number	85369010
Country of origin	NL
Product description	Interface module

Data sheet

15387.2 USB-AB

Technical data

Dimensions

Length	47 mm
Width	33 mm
Height TS 35/7.5	48 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Screw connection
Number of connections	2
No. of poles	4
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	7 mm
Torque	0.6 Nm

Input data

Max. operating voltage AC/DC	30 V
Current load per channel, max.	1 A
Category	1.1
Transmission speed max.	12 Mbps

Materials

Contact material	CuAl with gold plating
Flammability class UL 94	V-2
Working temperature, min.	-20 °C
Working temperature, max.	50 °C

Data sheet

15387.2 USB-AB



Technical data

Further technical data

Mounting type	TS 35
Connector type	USB A/B
Plug-in cycles acc. to standard	1500
Test voltage	0.75 kV
Shielded	✓

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

15387.2 USB-AB



Approvals


Standards and regulations

Standards / specifications	DIN VDE 0110 / EN 50178
----------------------------	-------------------------

Data sheet

15387.2 USB-AB

Media

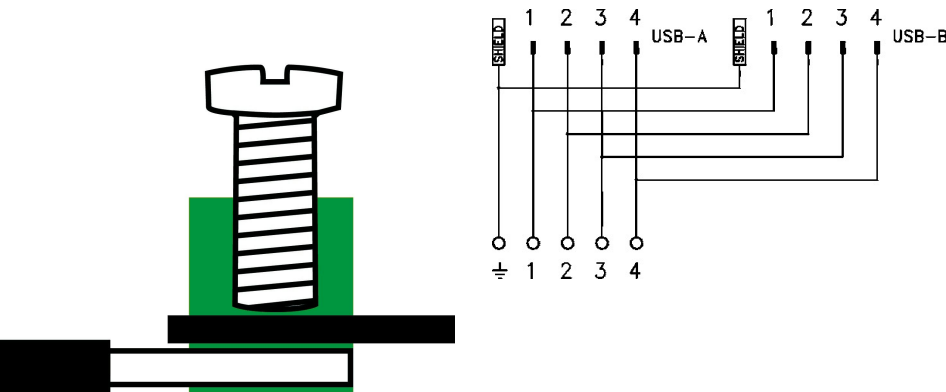

Accessories
