


Data sheet

15731.2 PRSU 4G/110V DC

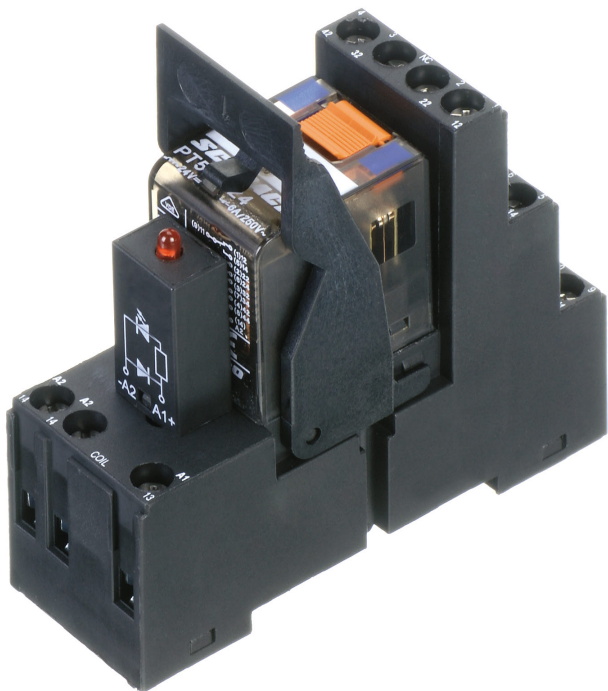

Pre-assembled relay module PRS..., Screw connection, Consisting of: relay socket base, power contact relay, pluggable display/suppression module and holding clip, 4 CO contacts, Input voltage: 110 VDC

Business data

Article number	15731.2
Article name	PRSU 4G/110V DC
GTIN (EAN)	4044211138516
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	55.4 g
Weight per piece (including packaging)	61.2 g
Unit of weight	G
Customs number	85364900
Country of origin	DE
Product description	Complete module

Technical data

Dimensions

Length	76 mm
Width	27.1 mm
Height TS 35 / 7.5 with BA	87 mm

Ratings

Rated voltage Un	110 VDC -
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	2.5 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	1.5 mm ²
Stripping length	8 mm
Torque	0.8 Nm

Input data

Drop-out voltage	11 VDC
Operating range	ab 82,5 VDC
Power consumption	0,75 W

Output data

Switching voltage / switching voltage max.	240 / 240 VAC
Continuous current max. / Inrush current max.	6 / 12 A
Contact configuration	4 CO contacts
Switching capacity, max.	1500 VA
Electrical lifespan (AC1)	1,5x10 ⁵
Mechanical lifespan	30x10 ⁶
Contact load, min.	120 mW
Bounce time at close of the NO/NC contact	6/8 ms

Technical data

Materials

Contact material	AgNi 90/10
Flammability class UL 94	V-0
Working temperature, min.	-25 °C
Working temperature, max.	70 °C

Further technical data

Degree of protection	IP20
Status display	✓
Insulation voltage coil/contact	2,5 kV
Free-wheel diode	✓
Response/release time	10 / 18 ms
Insulation voltage contact/contact	1,2 kV
Test button	✓
Vibration resistance NO/NC	7/4 g
Pinning	2.8 (fast-on) mm
Coil and contact connections are separated	✓

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

15731.2 PRSU 4G/110V DC




Approvals

Standards and regulations

CE compliant	yes
--------------	-----

Media

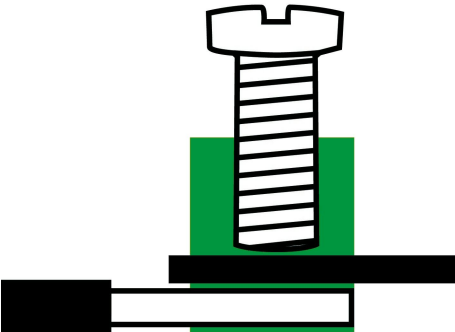

Accessories

Cross-connector



External cross-connector insulated, for relay socket base PRS 4/6-pole, can be shortened, Voltage: 250 V, Current: 10 A

Article number	Article name	GTIN (EAN)	Packaging unit
<u>15778.2</u>	AQI/PRS/6 BK	4044211133993	20 ST

Screwdriver



Screwdriver with bare blade, Colour: Black-grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1086.0</u>	SDB 0,6x3,5	4044211014797	1 ST

Relays



Plug-in industrial relays with power contacts, 4 CO contacts, Test button, Mechanical switching position indicator, Polarity A1+, A2-, Input voltage: 110 VDC

Article number	Article name	GTIN (EAN)	Packaging unit
<u>15542.2</u>	PRS 4/110V DC	4044211117931	1 ST

Holding clamp



Relay holding clip, With eject, Suitable for relay socket base PRS 4, for industrial relays

Article number	Article name	GTIN (EAN)	Packaging unit
<u>15140.2</u>	PRS C4	4044211046224	1 ST

Insert modules

Data sheet

15731.2 PRSU 4G/110V DC



Insertion module, Suitable for relay socket base PRS, LED red status display, With free-wheel diode

Article number	Article name	GTIN (EAN)	Packaging unit
<u>15422.2</u>	PRS LED(RD)/110V DC	4044211104306	1 ST