

Signal converter for connecting PT 100 thermal sensors to an analogue standard signal, Screw connection, Mounting type: Mounting rail TS 35, Supply voltage: 24 VDC

### Business data

Article number	<u>15752.2</u>
Article name	CML-PT100-UI/-50..50°C
GTIN (EAN)	4044211133283
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	57 g
Weight per piece (including packaging)	80 g
Unit of weight	G
Customs number	85423990
Country of origin	NL
Product description	Converter unit

### Technical data

#### Dimensions

Length	93.1 mm
Width	6.2 mm
Height	102.5 mm

#### Ratings

Overvoltage category	III
Contamination degree	2

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	2.5 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	12 mm
Torque	0.6 Nm

#### Input data

Temperature range	-50-50 °C
Line resistance	<100 Ohm

#### Output data

Output signal adjustable via DIP switch	✓
Load resistance U	>1K Ohm
Load resistance I	<500 Ohm
Offset I	20 µA
Offset U	10 mV
Output signal I, max.	22 mA
Output signal U, max.	11 V

#### Materials

Working temperature, min.	-20 °C
Working temperature, max.	55 °C
Temperature coefficient	<0,02% / K °C

---

### Technical data

---

#### Further technical data

---

Power supply	24 VDC -15% / +10% -
Current consumption	40 mA
Transmission error (from end value)	<0,2%
Limit frequency (-3 dB)	10 Hz
Protection class	IP20

---

#### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

---

---

### Approvals

---

#### Standards and regulations

---

CE compliant

yes



---

Standards / specifications

DIN VDE 0110 / EN 50178

---

### Media

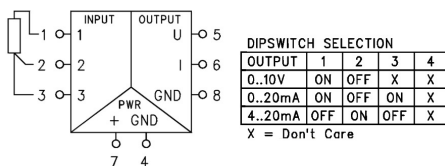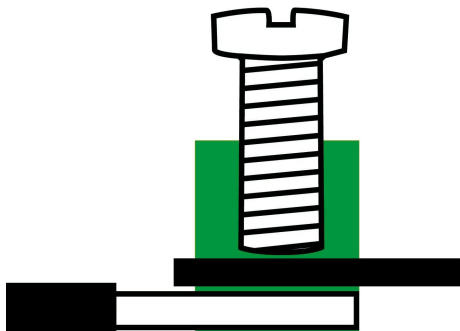

DIPSWITCH SELECTION

OUTPUT	1	2	3	4
0..10V	ON	OFF	X	X
0..20mA	ON	OFF	ON	X
4..20mA	OFF	ON	OFF	X

X = Don't Care

### DIPSWITCH SELECTION

OUTPUT	1	2	3	4
0..10V	ON	OFF	X	X
0..20mA	ON	OFF	ON	X
4..20mA	OFF	ON	OFF	X

X = Don't Care

---

### Accessories

---