


# Data sheet

## 15919.2 CMS-RTD-UI

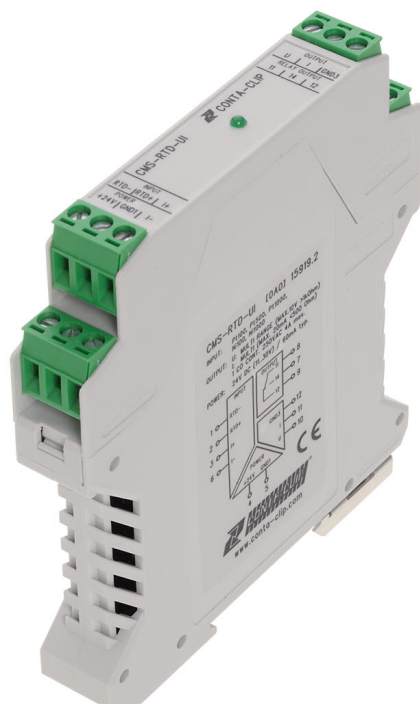

Signal converter for connecting PT and NI thermal sensors to an analogue standard signal, 3-way electrical isolation, Screw connection, Mounting type: Mounting rail TS 35, Supply voltage: 24 VDC

### Business data

Article number	<u>15919.2</u>
Article name	CMS-RTD-UI
GTIN (EAN)	4044211142124
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	55.3 g
Weight per piece (including packaging)	79.3 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Converter unit

### Technical data

#### Dimensions

Length	99 mm
Width	17.5 mm
Height	114.5 mm

#### Ratings

Overvoltage category	III
Contamination degree	2

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	2.5 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	7 mm
Torque	0.6 Nm

#### Input data

Sensor feed current	200 μ -
Input signals adjustable via DIP switch	1

#### Output data

Continuous current (resistive load), max.	3 A
Output signal adjustable via DIP switch	✓
Load resistance U	>1K Ohm
Relay contact	1 CO contact
Load resistance I	<600 Ohm
Offset I	20 μA
Offset U	<10 mV
Output signal I, max.	22 mA
Output signal U, max.	<11 V

---

### Technical data

---

#### Materials

Working temperature, min.	-20 °C
Working temperature, max.	55 °C
Temperature coefficient	<0,01% / K °C

#### Further technical data

Power supply	24 VDC ± 10% -
Current consumption	60 mA
Electrical isolation	✓
Response time	200 ms
Protection class	IP20
Insulation voltage input / output	1 kV / 50 Hz / 1 min
Insulation voltage power supply / signal	1 kV / 50 Hz / 1 min
Conversion error set / not set	<0,3% F.S. / <1% F.S.

#### Environmental Product Compliance

REACH Candidate Substance Note	No
--------------------------------	----

---

### Approvals

---

#### Standards and regulations

---

CE compliant

yes



---

Standards / specifications

DIN VDE 0110 / EN 50178

---

### Media

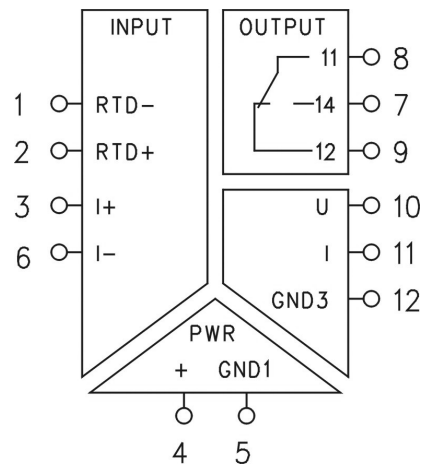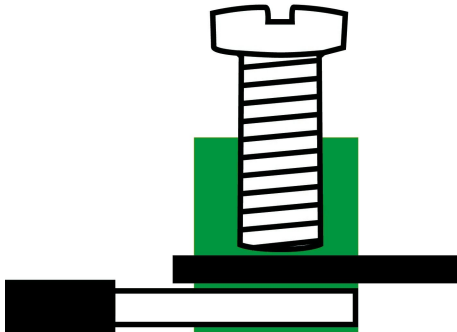

---

### Accessories

---