

Data sheet

16024.2 PRSUXT 2Z/24V AC



Pre-assembled relay module PRSXT, Tension-spring connection, Consisting of: relay socket, holding clip and power contact relay with test button and status LED. 2 CO contacts, Input voltage: 24 VAC

Business data

Article number	16024.2
Article name	PRSUXT 2Z/24V AC
GTIN (EAN)	4044211145293
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	60 g
Weight per piece (including packaging)	60 g
Unit of weight	G
Customs number	85364900
Country of origin	DE
Product description	Complete module

16024.2 PRSUXT 2Z/24V AC

Technical data

Dimensions

Length	76 mm
Width	15.7 mm
Height TS 35 / 7.5 with BA	76 mm

Ratings

Rated voltage Un	24 VAC -
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Tension-spring connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	1.5 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	1.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	1 mm ²
Stripping length	12 mm

Input data

Drop-out voltage	3,6 VAC
Operating range	ab 18,0 VAC
Power consumption	0,76 W

Output data

Switching voltage / switching voltage max.	250 / 400 VAC
Continuous current max. / Inrush current max.	8 / 15 A
Contact configuration	2 CO contacts
Switching capacity, max.	2000 VA
Electrical lifespan (AC1)	50x10 ³
Mechanical lifespan	10x10 ⁶
Bounce time at close of the NO/NC contact	4/9 ms

Data sheet

16024.2 PRSUXT 2Z/24V AC



Technical data

Materials

Contact material	AgNi 90/10
Flammability class UL 94	V-0
Working temperature, min.	-25 °C
Working temperature, max.	70 °C

Further technical data

Degree of protection	IP20
Status display	✓
Insulation voltage coil/contact	5 kV
Response/release time	10 / 5 ms
Insulation voltage contact/contact	1 kV
Test button	✓
Vibration resistance NO/NC	20/5 g
Pinning	5 mm
Coil and contact connections are separated	✓

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

16024.2 PRSUXT 2Z/24V AC




Approvals

Standards and regulations

CE compliant	yes
--------------	-----

Media

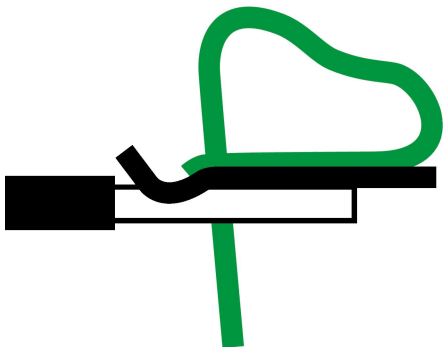

Accessories

Cross-connector



External cross-connector insulated, for relay socket base PRS 1 and PRS 2/6-pole, can be shortened, Voltage: 250 V, Current 10 A

Article number	Article name	GTIN (EAN)	Packaging unit
<u>15779.2</u>	AQI/PRS/8 BK	4044211134006	20 ST

Screwdriver



Screwdriver with bare blade, Colour: Black-grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1086.0</u>	SDB 0,6x3,5	4044211014797	1 ST

Holding clamp



Relay holding clip, With eject, Suitable for relay socket base PRS 1 and PRS 2, for industrial relay XT

Article number	Article name	GTIN (EAN)	Packaging unit
<u>16016.2</u>	PRSXT C1/2	4044211145217	20 ST