



Primary clocked power supply, Push-In connection, Mounting type: Mounting rail TS 35, Input: 1-phase, Output: 24 VDC/10 A

### Business data

Article number	<u>16184.2</u>
Article name	PSPC 230/24-10A
GTIN (EAN)	4044211184582
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	1022 g
Weight per piece (including packaging)	1120 g
Unit of weight	G
Customs number	85043180
Country of origin	DE
Product description	DC power supply

### Technical data

#### Dimensions

Length	55 mm
Width	127 mm
Height TS 35/7.5	161 mm
Required minimum clearance (top/bottom)	50 mm

#### Ratings

Nominal input voltage	100 V
Nominal input voltage AC max.	230 V
Rated output voltage	24 ±1 % V
Input current at rated load	2,74 A
Input current at max. nominal input voltage	1,25 A
Power loss for rated load	24,4 W
Rated frequency min.	47 Hz
Rated frequency max.	63 Hz
Mains failure bridging time at rated load and min. nominal input voltage	15 ms
Mains failure bridging time at rated load and max. nominal input voltage	17 ms
Switch-on time at rated load and min. nominal input voltage	1,3 s
Switch-on time at rated load and max. nominal input voltage	0,25 s
Contamination degree	2

#### Connection data

Connection principle	Push-in connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	10 mm

### Technical data

#### Input data

Input voltage derating	-2,5 %
Inrush current limit	<30 A, NTC
Recommended circuit breaker	6, 10, 16 (B,C) A

#### Output data

Output voltage DC min.	23 V
Output voltage DC max.	28,5 V
Internal overvoltage protection (OVP), max.	40 VDC
Output current	10 A
Output current limitation	11 A
Residual ripple at rated load	50 mVss
Can be wired in series	✓
Can be switched in parallel	✓
Feedback resistance, max.	35 VDC

#### Materials

Working temperature, min.	-25 °C
Working temperature, max.	70 °C
Relative humidity, min.	30 %
Relative humidity, max.	85 %

#### Further technical data

Protection class	IP20
Storage temperature, min.	-25 °C
Storage temperature, max.	85 °C
Efficiency	91 %
Convection cooling	✓
Signal display DC OK	LED, green (Uout > 21.5 V)
Transient overvoltage protection	Varistor
Derating at K > 50 °C	-3 %
Power loss at no load	6,6 W
Power loss, max.	31,3 W (100 VAC / 24 V / 10 A)
Signal output DC OK	Relay contact (Uout > 21.5 V)

---

### Technical data

---

#### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

---

---

### Approvals

---

#### Standards and regulations

---


CE compliant	yes
EMC	EN 61204-3
Safety	EN 61558-2-16, EN 60950-1
Protective low voltage (SELV/PELV)	IEC 60364-4-41 (DIN VDE 0100-410)

---

---

### Media

---

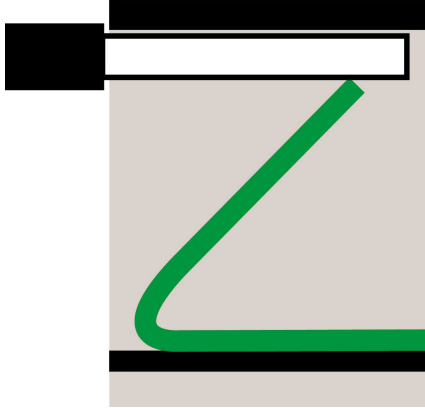

---

### Accessories

---