


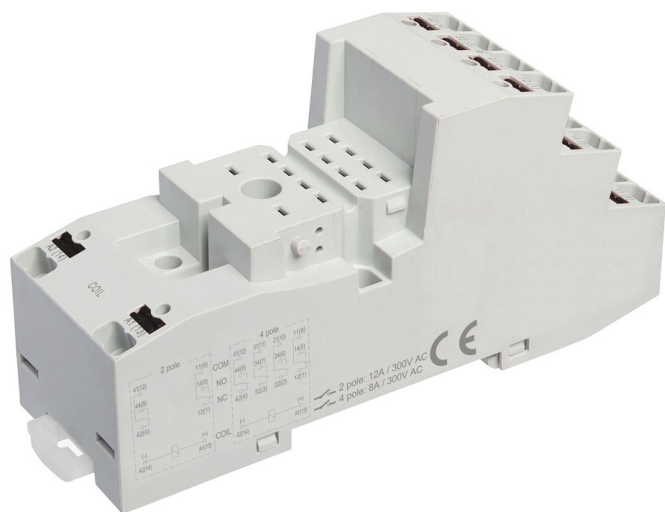

Relay socket base PRS, for industrial relay with 4 CO contacts, Push-in connection, Plug-in option for input/suppression modules and cross connections, Mounting type: Mounting rail TS 35

RAL: Ähnlich 7035

Kaufmännische Daten

Artikelnummer	16504.2
Artikelbezeichnung	PPRS 4
GTIN (EAN)	4044211236250
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	76 g
Weight per piece (including packaging)	81.8 g
Unit of weight	G
Customs number	85366990
Country of origin	PL
Product description	Relais-Stecksocket mit Push-in Anschluss
Colour	Grey

Technische Daten

Dimensions

Length	97 mm
Width	31 mm
Height	45.9 mm
Height TS 35/7.5	47.4 mm
Height TS 35 / 7.5 with BA	77.3 mm

Ratings

Rated voltage Un	300 -
Overvoltage category	II
Contamination degree	2

Connection data

Connection principle	Push-in Anschluss
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	1.5 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	1.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	1 mm ²
Stripping length	10 mm

Output data

Switching voltage / switching voltage max.	300 /300 VAC
Continuous current max. / Inrush current max.	8 A
Contact configuration	2 CO contacts

Materials

Flammability class UL 94	V-0
Working temperature, min.	-20 °C
Working temperature, max.	70 °C

Further technical data




Degree of protection	IP20
Insulation voltage coil/contact	4 kV
Insulation voltage contact/contact	1 kV
Pinning	2,8 Fast-on mm

Technische Daten

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

Medien

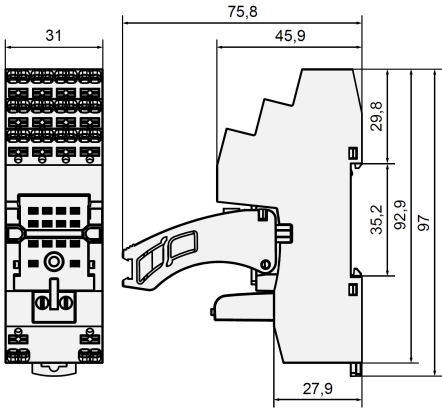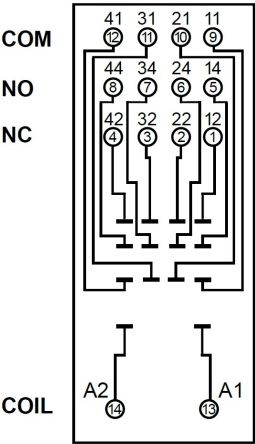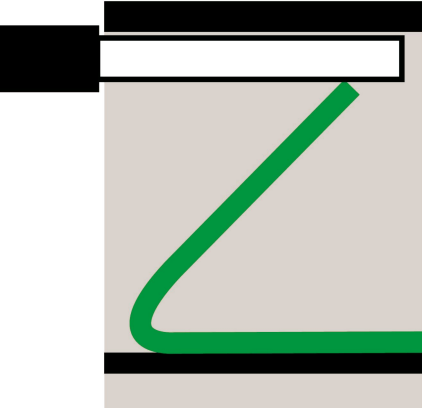

Zubehör

Holding clamp



Relay holding clip, With eject, Suitable for relay socket base PPRS 4, for industrial relays

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>16506.2</u>	PPRS C4	4044211236267	10 ST

Cross-connector



External cross-connector insulated for PPRS 4 Relays, 8-pole, can be shortened, Voltage: 250 V, Current: 10 A, Colour: Blue

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>16508.5</u>	AQI PPRS4/8 BU	4044211236274	10

Insert modules



Insertion module, Suitable for relay socket base PRS, LED red status display, With free-wheel diode

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>15141.2</u>	PRS LED(RD) 24V DC	4044211046231	1 ST



Insertion module, Suitable for relay socket base PRS, LED red status display

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>15142.2</u>	PRS LED(RD) 230V AC	4044211046255	1 ST



Insertion module, Suitable for relay socket base PRS, LED red status display

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>15175.2</u>	PRS LED(RD) 24V UC	4044211046521	1 ST

Insert modules



Insertion module, Suitable for relay socket base PRS, LED red status display, With free-wheel diode

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>15422.2</u>	PRS LED(RD)/110V DC	4044211104306	1 ST

Plug-in module, Suitable for relay socket base PRS, RC element, Input voltage: 24 VAC

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>15808.2</u>	PRS RC 24V AC	4044211135201	1 ST

Plug-in module, Suitable for relay socket base PRS, RC element, Input voltage: 240 VAC

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>15809.2</u>	PRS RC 240V AC	4044211135218	1 ST



Insertion module, Suitable for relay socket base PRS, LED red status display, With varistor

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>15810.2</u>	PRS LED(RD) 230V UC Var.	4044211135225	1 ST



Insertion module, Suitable for relay socket base PRS, LED red status display, With varistor

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>16070.2</u>	PRS LED(GN) 24V UC Var.	4044211146078	1 ST

Screwdriver



Screwdriver with bare blade, Colour: Black-grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>1085.0</u>	SDB 0,5x3,0	4044211014643	1 ST