

Double-level terminal with electronic components, Screw connection, Mounting type:Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6.1 mm, Colour: Beige

Business data

| Article number | 17564.2 |
|--|---|
| Article name | SRKD 4/D3 BG |
| GTIN (EAN) | 4044211234645 |
| Packaging unit | 100 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 17.23 g |
| Weight per piece (including packaging) | 18.18 g |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | BG |
| Product description | Double-level terminals with electronic components |
| Colour | Beige |
| | |





| Technical data | |
|--|---------------------|
| Dimensions | |
| Length | 76 mm |
| Width | 6.1 mm |
| Height TS 35/7.5 | 65 mm |
| Ratings | |
| Rated voltage | 1000 V |
| Rated cross-section | 4 mm² |
| Rated impulse voltage | 8 kV |
| Overvoltage category | III |
| Contamination degree | 3 |
| Connection data | |
| Connection principle | Screw connection |
| Connection position | Lateral |
| Connections | 2 x 2 |
| Number of terminals per level | 2 |
| Number of levels | 2 |
| Wire cross-section single-core (rigid) / stranded, min. | 0.2 mm ² |
| Wire cross-section single core (rigid)/stranded, max. | 6 mm² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 6 mm² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 4 mm² |
| Wire cross-section AWG, min. | 26 |
| Wire cross-section AWG, max. | 10 |
| Stripping length | 10 mm |
| Screw head | Slotted |
| Screw threading | M 3 |
| Tightening torque, min. | 0.5 Nm |
| Tightening torque, max. | 1 Nm |






| Materials | |
|-------------------------------------|-------------------------|
| Insulation housing | Polyamide 6.6 |
| Flammability class UL 94 | V-0 |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 120 °C |
| Further technical data | |
| Mounting type | Mounting rail TS 35/7,5 |
| Gauge plug acc. to EN 60 947-1 | A4 |
| Number of cross-connection channels | 3 |
| End plate required | ✓ |
| Diode | 2x 1N4007 / 1000V / 1A |
| Number of test pick-off options | 1 |
| Environmental Product Compliance | |
| REACH Conform | yes |
| REACH Reference date | 2023-06-14 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |





Media

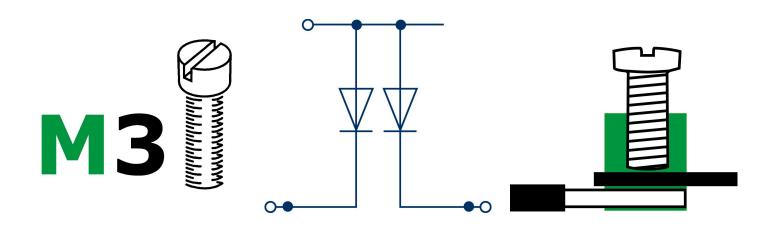

17564.2 SRKD 4/D3 BG



Accessories

End plate



End plate, Width: 1.5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|---------------|---------------|----------------|
| 17292.2 | SAPD 2,5-4 BG | 4044211190828 | 20 |

End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 8 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| 17250.2 | SES 35 BG | 4044211178253 | 50 |

Insulated cross-connector



Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 17.4 mm, Rated cross-section: 4 mm², Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| 17212.8 | SQI 4/3 YE | 4044211148652 | 50 |



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 11.3 mm, Rated cross-section: 4 mm², Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>17211.8</u> | SQI 4/2 YE | 4044211148645 | 50 |



Insulated cross-connector, No. of poles: 8, Mounting type: Plug in, Width: 47.9 mm, Rated cross-section: 4 mm², Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| 17217.8 | SQI 4/8 YE | 4044211148706 | 10 |

17564.2 SRKD 4/D3 BG



Insulated cross-connector



Insulated cross-connector, No. of poles: 9, Mounting type: Plug in, Width: 54 mm, Rated cross-section: 4 mm², Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| 17218.8 | SQI 4/9 YE | 4044211148713 | 10 |



Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 60.1 mm, Rated cross-section: 4 mm², Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| 17219.8 | SQI 4/10 YE | 4044211148720 | 10 |



Insulated cross-connector, No. of poles: 5, Mounting type: Plug in, Width: 29.6 mm, Rated cross-section: 4 mm², Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| 17214.8 | SQI 4/5 YE | 4044211148676 | 20 |



Insulated cross-connector, No. of poles: 6, Mounting type: Plug in, Width: 35.7 mm, Rated cross-section: 4 mm², Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|-------------------|
| 17215.8 | SQI 4/6 YE | 4044211148683 | 20 |



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 23.5 mm, Rated cross-section: 4 mm², Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| 17213.8 | SQI 4/4 YE | 4044211148669 | 20 |

Insulated cross-connector, No. of poles: 30, Mounting type: Plug in, Width: 181.1 mm, Rated cross-section: 4 mm², Colour: Yellow

| 111111111111111111111111111111111111111 | Article number | Article name | GTIN (EAN) | Packaging unit |
|---|----------------|--------------|---------------|-------------------|
| | 17220.8 | SQI 4/30 YE | 4044211148737 | 5 |





Insulated cross-connector



Insulated cross-connector, No. of poles: 7, Mounting type: Plug in, Width: 41.8 mm, Rated cross-section: 4 mm², Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| 17216.8 | SQI 4/7 YE | 4044211148690 | 20 |

Screwdriver

Screwdriver with bare blade, Colour: Black-grey



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|-------------------|
| 1086.0 | SDB 0,6x3,5 | 4044211014797 | 1 ST |