

Protective-earth double-level terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6.1 mm, Colour: Green-yellow

Kaufmännische Daten

Artikelnummer	<u>27071.2</u>
Artikelbezeichnung	PSLD 4 GNYE
GTIN (EAN)	4044211246457
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	18.94 g
Weight per piece (including packaging)	19.94 g
Unit of weight	G
Customs number	85369010
Country of origin	DE
Product description	Protective-earth double-level terminal
Colour	Green-yellow

Technische Daten

Dimensions

Length	75.7 mm
Width	6.1 mm
Height	48.8 mm
Height TS 35/7.5	50.3 mm

Ratings

Rated cross-section	4 mm ²
Rated impulse voltage	6 kV
Overvoltage category	3
Contamination degree	III

Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	4
Number of terminals per level	2
Number of levels	2
Levels internally bridged	✓
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	6 mm ²
Wire cross-section stranded, min.	0.5 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	4 mm ²
Wire cross-section AWG, min.	20
Wire cross-section AWG, max.	10
Stripping length	12 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

Technische Daten

Further technical data

Mounting type	Mounting rail TS 35/7,5 and TS 35/15
Gauge plug acc. to EN 60 947-1	A4
Number of cross-connection channels	2
End plate required	✓

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

Zulassungen

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2:2009
--------------------	-------------------


KEMA KEUR approval applied for	yes
--------------------------------	-----

UL Recognized

UL approval	UL 1059
-------------	---------

UL Recognized applied for	1
---------------------------	---

Medien

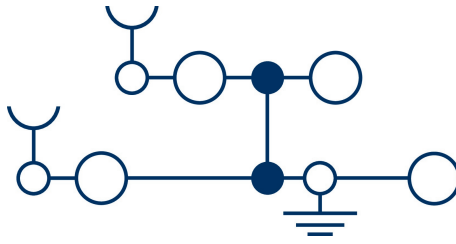

Zubehör

End plate

End plate, Width: 1.5 mm, Colour: Beige

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>27178.1</u>	PAPD 4 GN	4044211242688	20

End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3811.2</u>	ZES 35/2 BG	4044211080600	50

Test plug



Test plug, Colour: Red

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>2007.0</u>	PS 2,3	4044211048105	20 ST

Insulated cross-connector



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 10.1 mm, Colour: Red


Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>27142.9</u>	PQI 4/2 RD	4044211225285	50



Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 119.9 mm, Colour: Red

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>27151.9</u>	PQI 4/20 RD	4044211225339	5

Insulated cross-connector




Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 16.2 mm, Colour: Red

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>27143.9</u>	PQI 4/3 RD	4044211225292	50



Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 58.9 mm, Colour: Red

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>27150.9</u>	PQI 4/10 RD	4044211225322	10



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 22.3 mm, Colour: Red

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>27144.9</u>	PQI 4/4 RD	4044211225308	20


Identification adapter



Label holder, Pitch size: 5.1 mm, Colour: grey

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>27174.6</u>	PBA 2 GR	4044211226947	20 ST

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>4702.7</u>	PMC SB 6/50 WH	4044211089986	500 ST

Screwdriver

Screwdriver with bare blade, Colour: Black-grey



Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>1085.0</u>	SDB 0,5x3,0	4044211014643	1 ST

##INVERSE##CONTA-CONNECT

End plate, Width: 1.5 mm, Colour: Beige

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>27178.1</u>	PAPD 4 GN	4044211242688	20