

Protective-earth double-level terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm<sup>2</sup>, Width: 5.1 mm, Colour: Green-yellow

### Business data

Article number	<u>3236.2</u>
Article name	FSLD 2,5 GNYE
GTIN (EAN)	4044211130152
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	15.6 g
Weight per piece (including packaging)	16.57 g
Unit of weight	G
Customs number	85369010
Country of origin	BG
Product description	Protective-earth double-level terminal
Colour	Green-yellow

### Technical data

#### Dimensions

Length	75.4 mm
Width	5.1 mm
Height TS 35/7.5	53 mm
Height TS 35 / 7.5 with BA	66 mm

#### Ratings

Rated cross-section	2.5 mm <sup>2</sup>
Overvoltage category	III
Contamination degree	3

#### Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	4
Number of terminals per level	2
Number of levels	2
Levels internally bridged	✓
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	14
Stripping length	12 mm

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

---

### Technical data

---

#### Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A3
Number of cross-connection channels	2
End plate required	✓

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

### Approvals

#### Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

#### CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	yes
----------------------	-----

CSA wire cross-section AWG, min.	26
----------------------------------	----

CSA wire cross-section AWG, max.	12
----------------------------------	----

#### CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	yes
------------------------	-----

CSAus wire cross-section AWG, min.	26
------------------------------------	----

CSAus wire cross-section AWG, max.	12
------------------------------------	----

#### KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2:2009
--------------------	-------------------

KEMA KEUR approval granted	yes
----------------------------	-----

KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
---	---------------------

KEMA wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
---	-------------------



KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
--	---------------------

KEMA wire cross-section stranded, max.	4 mm <sup>2</sup>
--	-------------------

KEMA wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
---	---------------------

KEMA wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
---	---------------------

### Media

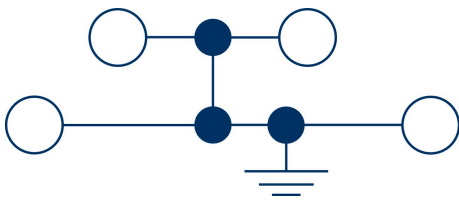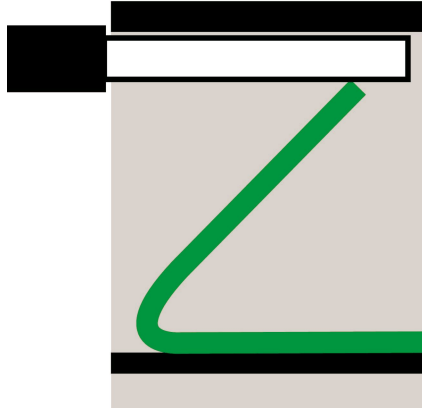

### Accessories

#### End plate



End plate, Width: 1.5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3423.2</u>	FAPD 2,5 BG	4044211130169	20

#### Identification adapter



Cover, Length: 3.4 mm, Width: 15.7 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3425.8</u>	FAD 1,5/4/B YE	4044211132910	20 ST

#### End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3811.2</u>	ZES 35/2 BG	4044211080600	50

#### Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4600.7</u>	PMC SB 5/50 WH	4044211088903	500 ST

#### Screwdriver

## 3236.2 FSLD 2,5 GNYE

Screwdriver with bare blade, Colour:



Article number	Article name	GTIN (EAN)	Packaging unit
<u>3164.0</u>	SDB 0,4x2,0	4044211107246	1 ST

### Four-way cover

Cover, Length: 3.4 mm, Width: 19.8 mm, Colour: Yellow



Article number	Article name	GTIN (EAN)	Packaging unit
<u>3426.8</u>	FAD 2,5/4/B YE	4044211132934	20 ST