



Crimping tool for crimping ferrules with and without plastic collars. Cross section range: 0.08-16 mm² (AWG 28-5). Wire entry can be rotated in 45° steps.

Business data

Article number	3845.0
Article name	Insert PZU 16/R
GTIN (EAN)	4044211236991
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	52 g
Weight per piece (including packaging)	55 g
Unit of weight	G
Customs number	82032000
Country of origin	DE
Product description	Crimping tool insert

3845.0 Insert PZU 16/R

Technical data

Application

Wire-end TWIN-ferrule cross-section, max.	2 x 0,25 mm ²
Wire-end TWIN-ferrule cross-section, min.	2 x 10,0 mm ²
Crimp shape	Trapezoidal crimp
Crimping range, min.	0.08 mm ²
Crimping range, max.	16 mm ²
Crimping range AWG, min.	28
Crimping range AWG, max.	5
Wire-end ferrule cross-section, min.	0.08 mm ²
Max wire-end ferrule cross-section	16 mm ²


Dimensions

Length	42 mm
Width	23 mm
Height	18 mm

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

Media

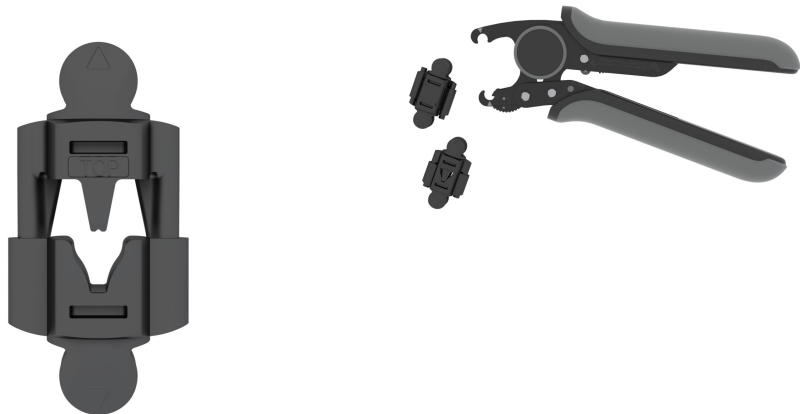

3845.0 Insert PZU 16/R

Accessories

##INVERSE##CONTA-CONNECT



Crimping tool for crimping ferrules with and without plastic collars. Cross section range: 0.08-16 mm² (AWG 28-5). Easy to use, forced lock for correct, complete crimping, conductor entry can be rotated in 45° steps, self-opening thanks to built-in spring.

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3844.0</u>	PZU 16/R	4044211236977	1 ST



Crimping tool for crimping ferrules with and without plastic collars. Cross section range: 0.08-16 mm² (AWG 28-5). Easy to use, forced lock for correct, complete crimping, conductor entry can be rotated in 45° steps, self-opening thanks to built-in spring.

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3846.0</u>	PZD 16/R	4044211236984	1 ST