



Glass-fibre reinforced polycarbonate housing, Colour: Grey, RAL: Similar to 7035, Cover: Polycarbonate, Grey

**RAL:** Ähnlich 7035

### Business data

Article number	<u>4370.2</u>
Article name	CK-PC 75/35 MV
GTIN (EAN)	4044211116897
Packaging unit	40
Quantity unit	PC
Weight per piece (not including packaging)	43.9 g
Weight per piece (including packaging)	43.91 g
Unit of weight	G
Customs number	39269097
Country of origin	DE
Product description	Polycarbonate housing
Colour	Grey

### Technical data

#### Dimensions

Length	65 mm
Width	50 mm
Height	35 mm

#### Materials

Material	Polycarbonate
Lid material	Polycarbonate
Lid colour	Grey
Lid screws	Polyamide 6, glass-fibre reinforced
Glass-fibre reinforced	✓
Flammability class UL 94	V-2
Flammability acc. EN 60695	960 ° C
Working temperature, min.	-35 °C
Working temperature, max.	80 °C
Sealing material	Polyurethane
Ambient temperature 24 hours	60 °C
Rel. humidity at 40 °C, max.	50 %
Short-term rel. humidity at 25 °C, max.	95 %
Halogen-free	✓
PVC-free	✓
No heavy metals	✓
Silicone-free	✓
Weather resistant	✓

#### Further technical data

Degree of protection	IP66
Protection class	II
Impact resistance	IK08
Rated insulation voltage AC	1000 V
Rated insulation voltage DC	690 V
Cable entries	✓
Can be lead-sealed	✓
Metric knock-outs	✓

---

### Technical data

---


#### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

---

### Media

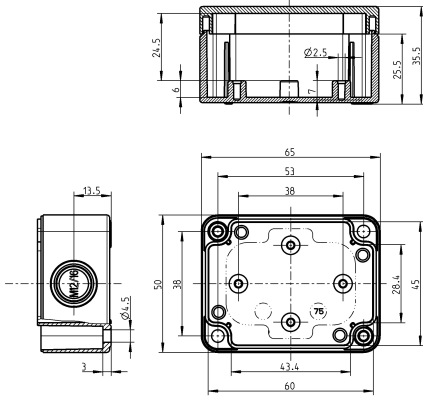

### Accessories

#### Outer joints



Outer joints, Colour: Grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4512.2</u>	AG/CK 77-CK 1809	4044211064235	2 ST

#### Mounting plate



Mounting plate, Material: Hard laminated paper, Melamine laminated, Colour: Grey, RAL: 7035

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4563.3</u>	MP/CK 75	4044211117481	1 ST

#### Wall brackets



Wall brackets, Material: Hard laminated paper, Melamine laminated, Colour: natural

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4512.1</u>	WL/CK	4044211064228	1 ST