



G4 solid-state relay Opto 22, pluggable, LED display, 5x20 micro-fuse, Input voltage: 5 VDC

Business data

Article number	5975.0
Article name	G 4 ODC 5
GTIN (EAN)	4044211070922
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	26.6 g
Weight per piece (including packaging)	29.4 g
Unit of weight	G
Customs number	85365003
Country of origin	US
Product description	Solid-state relay

Technical data

Input data

Input voltage	5 VDC
Drop-out voltage	1 VDC
Control current	12 mA
Number of channels	1
Operating range	2,5-8 VDC
Switch-on threshold U/I	2,5 V / -

Output data

Output voltage range	5-60 VDC V
Voltage drop at 20 °C and rated current, max.	1,6 V
Continuous current max. / Inrush current max.	3 (@45°C) / 5 A

Materials

Working temperature, min.	-30 °C
Working temperature, max.	70 °C

Further technical data

Status display	✓
Response/release time	100 / 750 μsec. ms
Remarks	1 NO contact
Test voltage	4 kV


Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

5975.0 G 4 ODC 5

Media

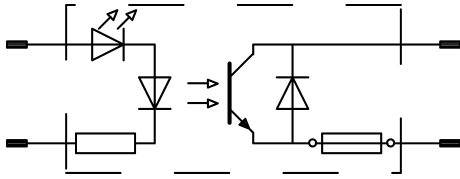

Data sheet

5975.0 G 4 ODC 5



Accessories
