


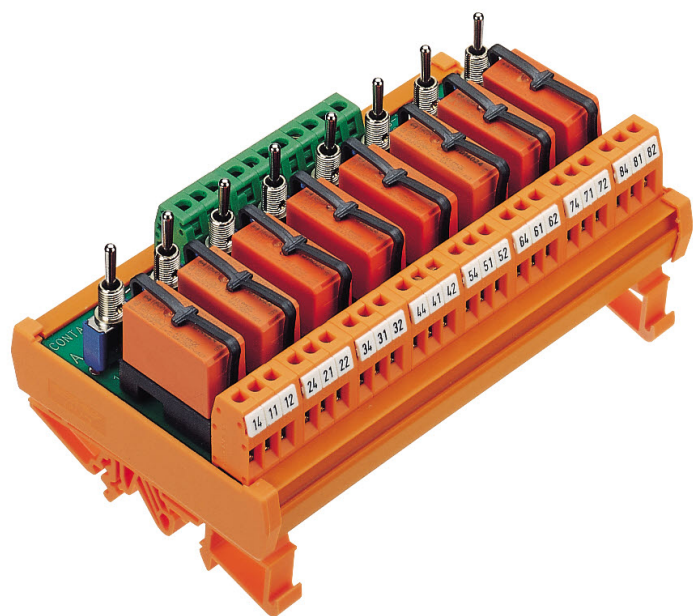

Multiple relay module with manual actuation, Screw connection, With 2 miniature relays, 1 CO contact each, Soldered, With illuminated display, Minus switching, Input voltage: 24 VDC

Business data

|                                            |                    |
|--------------------------------------------|--------------------|
| Article number                             | 6651.2             |
| Article name                               | RIMD2S-16A/1W/24V- |
| GTIN (EAN)                                 | 4044211075569      |
| Packaging unit                             | 1                  |
| Quantity unit                              | PC                 |
| Weight per piece (not including packaging) | 97 g               |
| Weight per piece (including packaging)     | 137.4 g            |
| Unit of weight                             | G                  |
| Customs number                             | 85364900           |
| Country of origin                          | NL                 |
| Product description                        | Relay module       |

### Technical data

#### Dimensions

|        |       |
|--------|-------|
| Length | 87 mm |
| Width  | 42 mm |
| Height | 74 mm |

#### Ratings

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Contamination degree | 2   |

#### Connection data

|                                                          |                      |
|----------------------------------------------------------|----------------------|
| Connection principle                                     | Screw connection     |
| Wire cross-section single core (rigid), min.             | 0.08 mm <sup>2</sup> |
| Wire cross-section single-core (rigid), max.             | 4 mm <sup>2</sup>    |
| Wire cross-section stranded, min.                        | 0.2 mm <sup>2</sup>  |
| Wire cross-section stranded, max.                        | 2.5 mm <sup>2</sup>  |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm <sup>2</sup>  |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm <sup>2</sup>  |
| Stripping length                                         | 7 mm                 |
| Torque                                                   | 0.6 Nm               |

#### Input data

|                                   |        |
|-----------------------------------|--------|
| Input voltage                     | 24 VDC |
| Number of channels                | 2      |
| Power consumption                 | 0,6 W  |
| reverse-polarity protection diode | 1      |
| Minus switching (sync)            | 1      |

#### Output data

|                                               |                    |
|-----------------------------------------------|--------------------|
| Switching voltage / switching voltage max.    | 250 / 250 VAC      |
| Continuous current max. / Inrush current max. | 16 / 16 A          |
| Contact configuration                         | 1 CO contact       |
| Switching capacity, max.                      | 4000 VA            |
| Electrical lifespan (AC1)                     | 8x10 <sup>4</sup>  |
| Mechanical lifespan                           | 30x10 <sup>6</sup> |

## 6651.2 RIMD2S-16A/1W/24V-

### Technical data

#### Materials

|                           |            |
|---------------------------|------------|
| Contact material          | AgNi 90/10 |
| Working temperature, min. | -20 °C     |
| Working temperature, max. | 55 °C      |

#### Further technical data

|                                 |          |
|---------------------------------|----------|
| Protection class                | IP20     |
| Insulation voltage coil/contact | 4 kV     |
| Status display red              | ✓        |
| Free-wheel diode                | ✓        |
| Response/release time           | 9 / 7 ms |
| Pinning                         | 5 mm     |
| Manual/Off/Automatic switching  | ✓        |
| Operating voltage indicator LED | ✓        |

#### Environmental Product Compliance


|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2023-06-14 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

### Approvals

#### Standards and regulations

|                            |                         |
|----------------------------|-------------------------|
| CE compliant               | yes                     |
| Standards / specifications | DIN VDE 0110 / EN 50178 |

Media

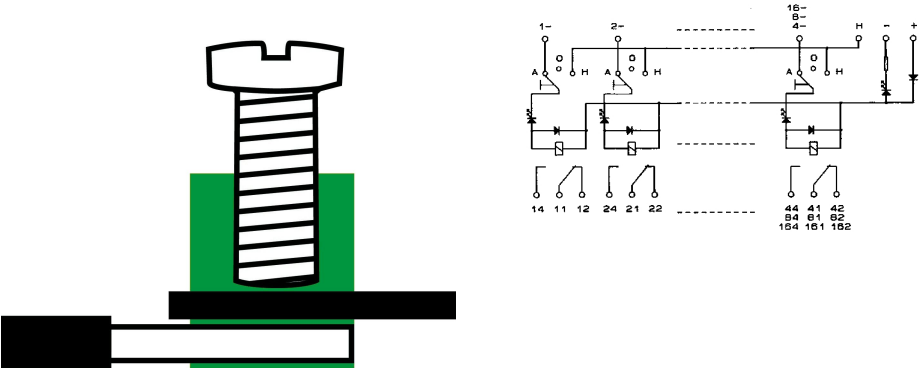

---

Accessories

---