


Data sheet

6759.2 ST8-24EG

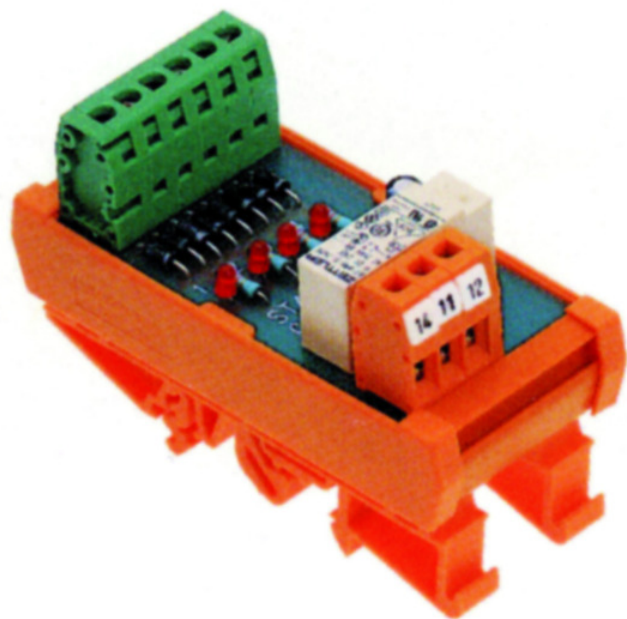

Monitoring module for collective fault signals, Screw connection, Mounting type: Mounting rail TS 35, 8 channels, Voltage: 24 VAC/DC

Business data

Article number	6759.2
Article name	ST8-24EG
GTIN (EAN)	4044211075804
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	90 g
Weight per piece (including packaging)	148 g
Unit of weight	G
Customs number	85364900
Country of origin	NL
Product description	Monitoring module

Data sheet

6759.2 ST8-24EG

Technical data

Dimensions

Length	57 mm
Width	87 mm
Height TS 35 / 7.5 with BA	68 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.08 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules,min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules,max.	2.5 mm ²
Stripping length	7 mm
Torque	0.6 Nm

Input data

Power supply AC/DC	24 V
Number of channels	8
Input signal U/I, max.	24 VAC/DC
Power consumption	0.5 W

Output data

Switching voltage, max.	250
Continuous current max. / Inrush current max.	6 / 8 A
Switching capacity, max.	2000 VA


Materials

Contact material	AgNi 90/10
------------------	------------

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Media

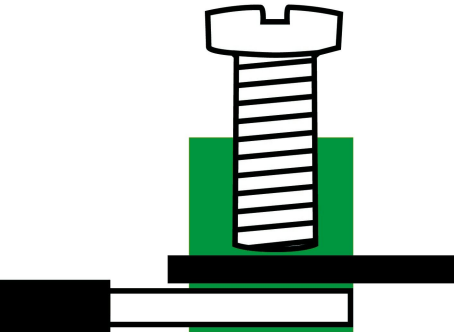

Accessories
