

Interface module for D-SUB, Screw connection and male D-SUB plug-in connector, Mounting type: Mounting rail TS 35, No. of poles: 25

Business data

| | |
|--|------------------|
| Article number | <u>15300.2</u> |
| Article name | SD-S25C |
| GTIN (EAN) | 4044211047023 |
| Packaging unit | 1 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 106.6 g |
| Weight per piece (including packaging) | 139.3 g |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | NL |
| Product description | Interface module |

Technical data

Dimensions

| | |
|------------------|-------|
| Length | 47 mm |
| Width | 78 mm |
| Height TS 35/7.5 | 61 mm |

Ratings

| | |
|----------------------|-----|
| Overvoltage category | III |
| Contamination degree | 2 |

Connection data

| | |
|--|---------------------|
| Connection principle | Screw connection |
| Number of connections | 1 |
| No. of poles | 25 |
| Wire cross-section single core (rigid), min. | 0.2 mm ² |
| Wire cross-section single-core (rigid), max. | 4 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 2.5 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm ² |
| Stripping length | 7 mm |
| Torque | 0.6 Nm |

Input data

| | |
|--------------------------------|-------|
| Max. operating voltage AC/DC | 125 V |
| Current load per channel, max. | 1,5 A |

Materials

| | |
|---------------------------|--------|
| Working temperature, min. | -20 °C |
| Working temperature, max. | 50 °C |

Further technical data

| | |
|----------------|-----------------|
| Mounting type | TS 35 |
| Connector type | D-sub male plug |
| Test voltage | 0.67 kV |
| Shielded | ✓ |

Data sheet

15300.2 SD-S25C

Technical data

Environmental Product Compliance

| | |
|--------------------------------|------------|
| REACH Conform | yes |
| REACH Reference date | 2024-01-23 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

Data sheet

15300.2 SD-S25C



Approvals

Standards and regulations


Standards / specifications

DIN VDE 0110 / EN 50178

Data sheet

15300.2 SD-S25C

Media

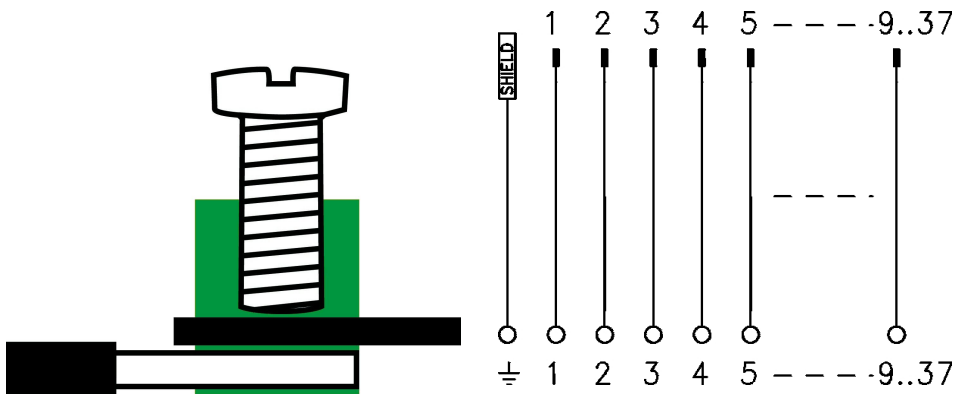

Data sheet

15300.2 SD-S25C



Accessories
