


# Data sheet

## 1031.2 RKD 4/UV/130V BG

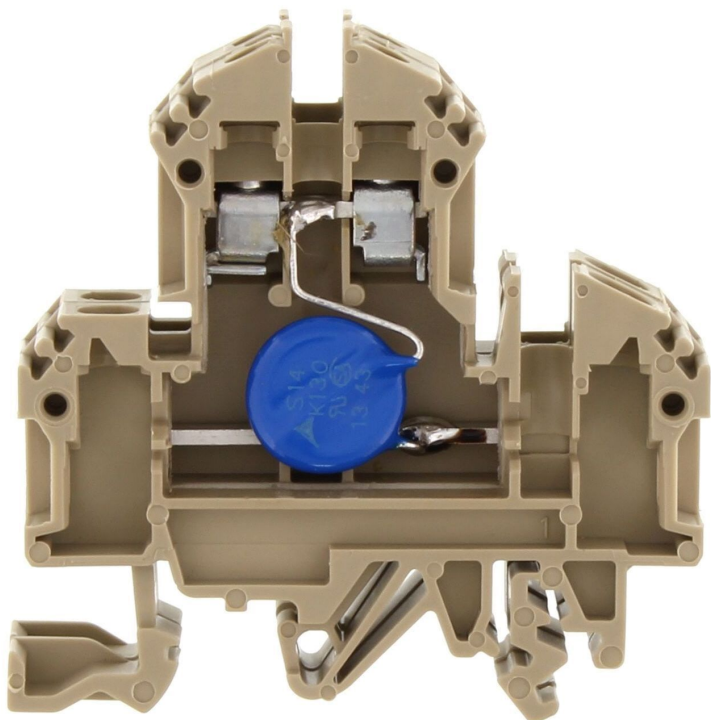

Double-level terminal with electronic components, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 12 mm, Colour: Beige

### Business data

|                                            |                                                   |
|--------------------------------------------|---------------------------------------------------|
| Article number                             | 1031.2                                            |
| Article name                               | RKD 4/UV/130V BG                                  |
| GTIN (EAN)                                 | 4044211006891                                     |
| Packaging unit                             | 50                                                |
| Quantity unit                              | PC                                                |
| Weight per piece (not including packaging) | 20.4 g                                            |
| Weight per piece (including packaging)     | 22 g                                              |
| Unit of weight                             | G                                                 |
| Customs number                             | 85369010                                          |
| Country of origin                          | BG                                                |
| Product description                        | Double-level terminals with electronic components |
| Colour                                     | Beige                                             |

### Technical data

#### Dimensions

|                  |         |
|------------------|---------|
| Length           | 60.2 mm |
| Width            | 12 mm   |
| Height TS 35/7.5 | 61 mm   |
| Height TS 32     | 65.5 mm |

#### Ratings

|                       |                   |
|-----------------------|-------------------|
| Rated voltage         | 130 V             |
| Rated current         | 10 A              |
| Rated cross-section   | 4 mm <sup>2</sup> |
| Rated impulse voltage | 6 kV              |
| Overvoltage category  | III               |
| Contamination degree  | 3                 |

#### Connection data

|                                                          |                     |
|----------------------------------------------------------|---------------------|
| Connection principle                                     | Screw connection    |
| Connection position                                      | Lateral             |
| Number of terminals per level                            | 2                   |
| Number of levels                                         | 2                   |
| Wire cross-section single-core (rigid) / stranded, min.  | 0.2 mm <sup>2</sup> |
| Wire cross-section single core (rigid)/stranded, max.    | 4 mm <sup>2</sup>   |
| Wire cross-section stranded, min.                        | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded, max.                        | 4 mm <sup>2</sup>   |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded with wire-end ferrules, max. | 4 mm <sup>2</sup>   |
| Wire cross-section AWG, min.                             | 22                  |
| Wire cross-section AWG, max.                             | 12                  |
| Stripping length                                         | 9 mm                |
| Screw head                                               | Slotted             |
| Screw threading                                          | M 3                 |
| Tightening torque, min.                                  | 0.5 Nm              |
| Tightening torque, max.                                  | 1 Nm                |

Technical data

Materials

|                           |               |
|---------------------------|---------------|
| Insulation housing        | Polyamide 6.6 |
| Flammability class UL 94  | V-2           |
| Working temperature, min. | -40 °C        |
| Working temperature, max. | 105 °C        |

Further technical data

|                                |                                   |
|--------------------------------|-----------------------------------|
| Mounting type                  | Mounting rail TS 35/7.5 and TS 32 |
| Varistor                       | ✓                                 |
| Gauge plug acc. to EN 60 947-1 | A4                                |
| End plate required             | ✓                                 |

Environmental Product Compliance

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2023-06-14 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

### Approvals

#### Standards and regulations

|              |                |
|--------------|----------------|
| EAC approval | TR ZU 004/2011 |
|--------------|----------------|

|                      |     |
|----------------------|-----|
| EAC approval granted | yes |
|----------------------|-----|

#### CSA approval

|              |              |
|--------------|--------------|
| CSA approval | C22.2 No 158 |
|--------------|--------------|

|                      |     |
|----------------------|-----|
| CSA approval granted | yes |
|----------------------|-----|

|                               |       |
|-------------------------------|-------|
| CSA Usegroup C: rated voltage | 300 V |
|-------------------------------|-------|

|                               |      |
|-------------------------------|------|
| CSA Usegroup C: rated current | 25 A |
|-------------------------------|------|

|                                  |    |
|----------------------------------|----|
| CSA wire cross-section AWG, min. | 22 |
|----------------------------------|----|

|                                  |    |
|----------------------------------|----|
| CSA wire cross-section AWG, max. | 12 |
|----------------------------------|----|

|                      |      |
|----------------------|------|
| CSA stripping length | 9 mm |
|----------------------|------|

|                  |      |
|------------------|------|
| CSA torque, max. | 1 Nm |
|------------------|------|

|                  |        |
|------------------|--------|
| CSA torque, min. | 0.5 Nm |
|------------------|--------|

#### KEMA KEUR approval

|                    |                   |
|--------------------|-------------------|
| KEMA KEUR approval | EN 60947-7-1:2009 |
|--------------------|-------------------|

|                            |     |
|----------------------------|-----|
| KEMA KEUR approval granted | yes |
|----------------------------|-----|

|                    |       |
|--------------------|-------|
| KEMA rated voltage | 500 V |
|--------------------|-------|

|                    |      |
|--------------------|------|
| KEMA rated current | 32 A |
|--------------------|------|

|                            |      |
|----------------------------|------|
| KEMA rated impulse voltage | 6 kV |
|----------------------------|------|

|                                                   |                     |
|---------------------------------------------------|---------------------|
| KEMA wire cross-section single core (rigid), min. | 0.2 mm <sup>2</sup> |
|---------------------------------------------------|---------------------|

|                                                   |                   |
|---------------------------------------------------|-------------------|
| KEMA wire cross-section single-core (rigid), max. | 4 mm <sup>2</sup> |
|---------------------------------------------------|-------------------|

|                                        |                     |
|----------------------------------------|---------------------|
| KEMA wire cross-section stranded, min. | 0.2 mm <sup>2</sup> |
|----------------------------------------|---------------------|

|                                        |                   |
|----------------------------------------|-------------------|
| KEMA wire cross-section stranded, max. | 4 mm <sup>2</sup> |
|----------------------------------------|-------------------|

### Approvals




#### UL Recognized

|                                                     |         |
|-----------------------------------------------------|---------|
| UL approval                                         | UL 1059 |
| UL Usegroup C: rated voltage                        | 300 V   |
| UL Usegroup C: rated current                        | 30 A    |
| UL wire cross-section single-core (rigid) AWG, min. | 22      |
| UL wire cross-section single-core (rigid) AWG, max. | 10      |
| UL wire cross-section stranded AWG, min.            | 22      |
| UL wire cross-section stranded AWG, max.            | 10      |
| UL torque                                           | 7 Lb In |
| UL wire material                                    | Cu      |
| UL factory wiring                                   | 1       |
| UL field wiring                                     | 1       |
| UL Recognized                                       | 1       |

#### German Lloyd approval

|                            |                    |
|----------------------------|--------------------|
| DNV GL Location Classes    | C                  |
| DNV GL approval granted    | 1                  |
| DNV GL rated cross-section | 4 mm <sup>2</sup>  |
| DNV GL rated current       | 34 A               |
| DNV GL rated voltage       | 500 V              |
| DNV GL test standard       | IEC 60947-7-1:2002 |

Media

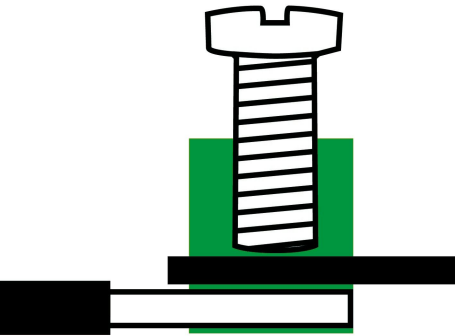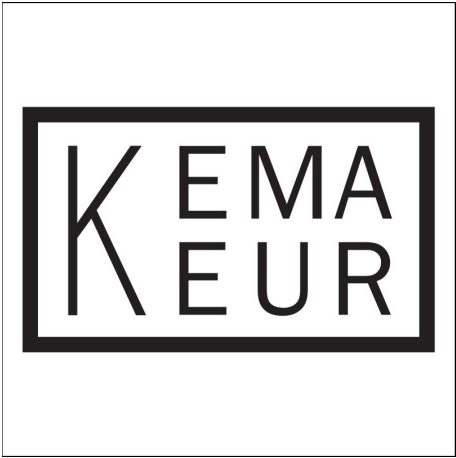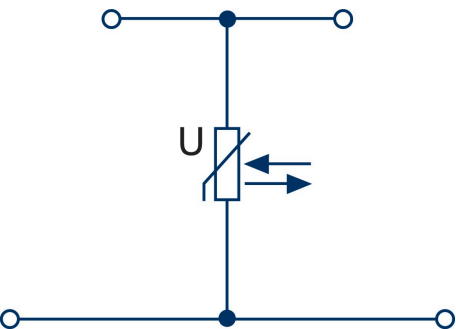




### Cross-connector



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 16.6 mm, Rated cross-section: 4 mm<sup>2</sup>, Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2088.0</u>  | Q 3          | 4044211048969 | 50 ST          |

### Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White

| Article number | Article name   | GTIN (EAN)    | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>4702.7</u>  | PMC SB 6/50 WH | 4044211089986 | 500 ST         |

### Screwdriver



Screwdriver with bare blade, Colour: Black-grey

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>1086.0</u>  | SDB 0,6x3,5  | 4044211014797 | 1 ST           |

### Socket plug



Socket plug, M 2.5, Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2075.0</u>  | STB 8,5/2,3  | 4044211048839 | 50 ST          |



Test plug



Test plug, Colour: Red

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2007.0</u>  | PS 2,3       | 4044211048105 | 20 ST          |