

## 28920.6 KES-R M50/68 GR



Round cable entry M50 with membrane for non-assembled cables, Mounting type: Snap-in and Screw, Length: 61 mm, Width: 61 mm, IP66, Colour: Grey

**RAL:** Ähnlich 7035

### Business data

Article number	28920.6
Article name	KES-R M50/68 GR
GTIN (EAN)	4044211247270
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	29.98 g
Weight per piece (including packaging)	30.38 g
Unit of weight	G
Customs number	39259020
Country of origin	DE
Product description	Cable Entry
Colour	Grey

### Technical data

#### Further technical data

Degree of protection for screw mounting	IP66
Number of cables for cable diameters 1,5 - 2,6 mm	68
Wall thickness with lock nut mounting, max.	11 mm
Wall thickness with snap-in mounting, max.	2,5 mm
Mounting type	Snap-on and screw-on
Degree of protection	IP66
Min wall thickness	1 mm
Torque for the locknut	7 Nm
Number of wires	68
Degree of protection for snap-in mounting	IP54

#### Dimensions

Length	61 mm
Width	61 mm
Installation height	8 mm

#### Materials

Material	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	80 °C
Sealing material	TPE
Halogen-free	✓
Silicone-free	✓



#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

# Data sheet

28920.6 KES-R M50/68 GR

## Media

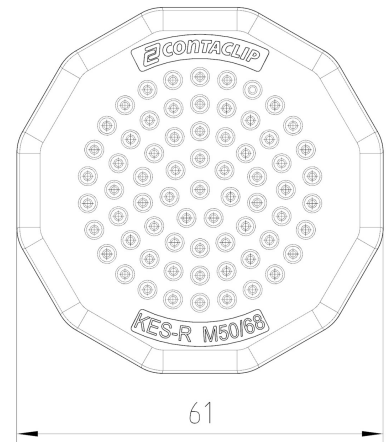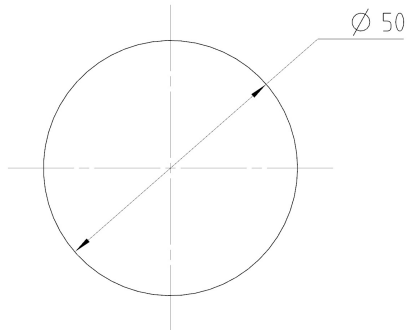

---

### Accessories

---

#### Locknuts

---



Hex. nut, Thread type: metric, Thread size: 50 mm, Material: Polyamide, Colour: Light grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4146.2</u>	S/M 50x1,5 GR	4044211114275	50

---