

### Business data

Article number	6152.2
Article name	IF-OF/6A
GTIN (EAN)	4044211072360
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	90 g
Weight per piece (including packaging)	129 g
Unit of weight	G
Customs number	85363010
Country of origin	NL
Product description	Interference-elimination link module

### Technical data

#### Dimensions

Length	40 mm
Width	87 mm
Height	60 mm

#### Ratings

Operating voltage AC, max.	250 V
Current, max.	6 A
Overvoltage category	III
Contamination degree	2
Operating voltage DC	250 V

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	7 mm

#### Input data

Frequency	400 Hz
-----------	--------

#### Materials

Working temperature, min.	-20 °C
Working temperature, max.	50 °C

#### Further technical data

Throttle	0,8 mH
Test voltage N-PE	2 kV / 50 Hz >2 s
Test voltage L-PE	2 kV / 50 Hz >2 s
Leakage current	2 x 0,2 mA

---

### Technical data

---

#### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2024-01-23
REACH Candidate Substance Note	No
RoHS Conform	yes

---

# Data sheet

## 6152.2 IF-OF/6A



---

### Approvals

---

#### Standards and regulations

---

Standards / specifications


DIN EN 50178 / DIN VDE 0110

---

# Data sheet

## 6152.2 IF-OF/6A

### Media

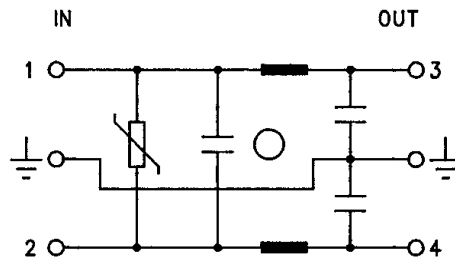

---

**Accessories**

---